



Nylon Hex Pipe Nuts





These natural nylon nuts are for use where insulation is desirable, such as plumbing, electrical work, etc.
Fit NPT sizes. Straight thread (available taper thread). Also see Nylon Locknuts, below.

Part No.	F	D	H
PN 1/8*	.562	.640	.225
PN 1/4	.812	.943	.232
PN 3/8	1.000	1.130	.285
PN 1/2	1.250	1.400	.362
PN 3/4	1.500	1.700	.409

Minimum order 100.

*This size only double chamfered; all others washer faced.
All sizes also available taper tapped (NPT).

Nylon Locknuts

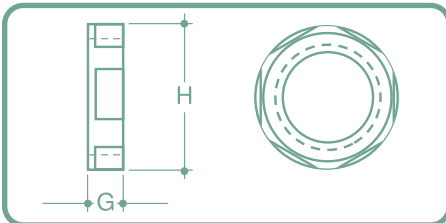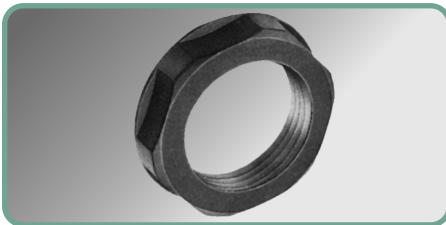

Part No.	Thread Type & Size	G	H
National Pipe Threads			
NLN1/4NPT	1/4 NPT	.265	.748
NLN3/8NPT	3/8 NPT	.265	1.058
NLN1/2NPT	1/2 NPT	.265	1.058
NLN3/4NPT	3/4 NPT	.265	1.312
NLN1NPT	1 NPT	.265	1.605
NLN1-1/4NPT	1-1/4 NPT	.281	1.968

PG Threads per DIN 40430

NLNPG7	PG 7	.218	.750
NLNPG9	PG 9	.218	.859
NLNPG11	PG 11	.218	.937
NLNPG13.5	PG 13.5	.250	1.062
NLNPG16	PG 16	.250	1.171
NLNPG21	PG 21	.281	1.406
NLNPG29	PG 29	.281	1.812
NLNPG36	PG 36	.281	2.244
NLNPG42	PG 42	.328	2.600
NLNPG48	PG 48	.328	3.060

Minimum order 100.


Standard colours: Black or Gray.

Also available in metal and nickel-plated brass.



Plastic Tube and Hose Fittings CONTINUED

TEES—BARBED

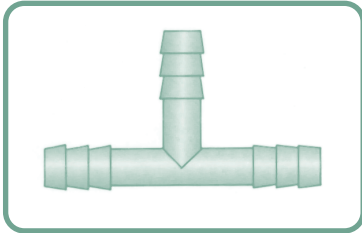

Part No.		Leg Hose ID	Tee Hose ID
Nylon	Black HDPE		
T 22	T 22 PE	1/8	1/8
T 532	T 532 PE	5/32	5/32
T 33	T 33 PE	3/16	3/16
T 36	T 36 PE		3/8
T 44	T 44 PE	1/4	1/4
T 45	T 45 PE		5/16
T 46	T 46 PE	1/4	3/8
T 48	T 48 PE		1/2
T 410	T 410 PE		5/8
T 55	T 55 PE		5/16
T 58	T 58 PE	5/16	1/2
T 510	T 510 PE		5/8

Part No.		Leg Hose ID	Tee Hose ID
Nylon	Black HDPE		
T 64	T 64 PE		1/4
T 66	T 66 PE		3/8
T 68	T 68 PE	3/8	1/2
T 610	T 610 PE		5/8
T 612	T 612 PE		3/4
T 86	T 86 PE		3/8
T 88	T 88 PE	1/2	1/2
T 810	T 810 PE		5/8
T 812	T 812 PE		3/4
T 1010	T 1010 PE	5/8	5/8
T 1212	T 1212 PE	3/4	3/4
T 1616	T 1616 PE	1	1
T 114	—	1-1/4	1-1/4
T 112	—	1-1/2	1-1/2
		2	
T 200	—		2

Minimum order 50.

NOTES:

Temperature Ratings


HDPE: -55° to +90°C
Nylon: -40° to +100°C



Nylon Hex Pipe Nuts

These natural nylon nuts are for use where insulation is desirable, such as plumbing, electrical work, etc.

Fit NPT sizes. Straight thread (available taper thread). Also see Nylon Locknuts, pages 92 or 131.

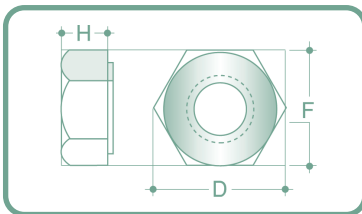

Part No.	F	D	H
PN 1/8*	.562	.640	.225
PN 1/4	.812	.943	.232
PN 3/8	1.000	1.130	.285
PN 1/2	1.250	1.400	.362
PN 3/4	1.500	1.700	.409

Minimum order 100.

* This size only double chamfered; all others washer-faced. All sizes also available taper tapped (NPT).