



☛ Snap Fasteners

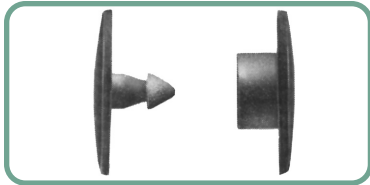

Two mating parts that securely connect flat panels together. Ideal for both rigid and compressible materials.

Snap fasteners require one male rivet and one female rivet for secure panel assembly.

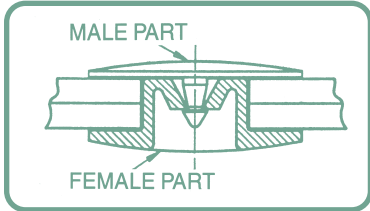


Assembly		Panel Thickness	Head Diameter (Male/Female)	Head Thickness (Male/Female)
Male Part No.	Female Part No.			
SF 3-00	SF 4-00	.170 -.190	.625	.062
SF 3-02	SF 4-00	.220 -.240	.625	.062
SF 3-05	SF 4-01	.170 -.190	.460	.062
SF 3-10	SF 4-00	.320 -.340	.625	.062



Minimum order 1000.

Assembly to fit a .320 diameter hole. Minimum pull out force: 40 lbs.

☛ Ratcheting Rivets

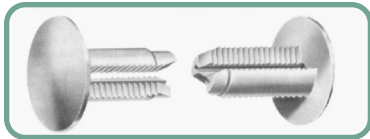

These nylon rivets are identical pairs with internally serrated prongs that ratchet together and provide for variable take-up. Ideal for both rigid and compressible material.

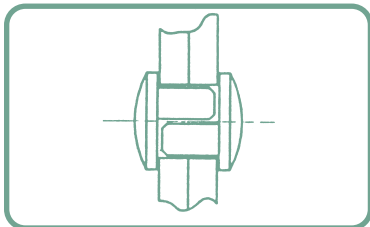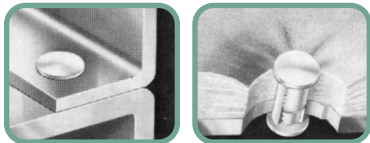

Part No.	Assembled Panel Thickness Range	Head Diameter and Thickness
RR 00	.235 -.297	.750/.093
RR 02	.346 -.500	.750/.093
RR 03	.500 -.812	.750/.093
RR 04	.780 -1.375	.750/.093
RR 05	.235 -.297	.406/.062
RR 07	.346 -.500	.406/.062
RR 08	.500 -.812	.406/.062
RR 09	.780 -1.375	.406/.062

Minimum order 1000.

NOTE: Two ratchet rivets are required to make one assembly.

Assembly to fit a .281 diameter hole.