




Universal Bushings

UNIVERSAL

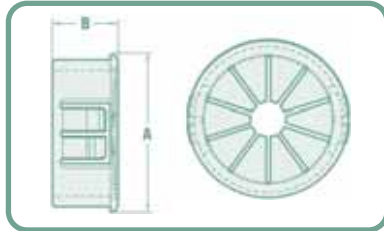

These nylon bushings absorb vibration, cushion and insulate cables, tubing, hoses or shafts. They feature flexible shutters which adjust to accommodate and support any shape. Easily locked into mounting hole with simple fingertip pressure.

The Shorty Universal Bushing is ideal for a thinner chassis thickness.

Part No.	Mounting Hole Diameter	Maximum Inside Diameter	A Head Diameter	B Overall Height	Max. Chassis Thickness	Minimum Order Quantity
UB500	.500	.312	.600	.385	.125	1,000
UB625	.625	.437	.718	.406	.125	1,000
UB750	.750	.500	.844	.390	.125	1,000
UB812	.812	.500	.890	.390	.125	1,000
UB875	.875	.562	.937	.453	.125	1,000
UB1000	1.000	.750	1.063	.453	.125	500
UB1093	1.093	.812	1.156	.453	.125	500
UB1375	1.375	1.000	1.490	.453	.125	500
UB1500	1.500	1.062	1.610	.450	.125	500

Standard colour: Black. White and other colours available at extra charge if quantities are sufficient.

SHORTY UNIVERSAL

Part No.	Mounting Hole Diameter	Maximum Inside Diameter	A Head Diameter	B Overall Height	Max. Chassis Thickness	Minimum Order Quantity
SUB500	.500	.312	.600	.250	.062	1,000
SUB625	.625	.437	.729	.250	.062	1,000
SUB750	.750	.500	.859	.250	.062	1,000
SUB875	.875	.560	.937	.250	.062	1,000
SUB1000	1.000 +.01 -.00	.750	1.063	.453	.062	1,000

Standard colour: Black. White and other colours available at extra charge if quantities are sufficient.