




Pigtail Strain Relief Bushings

FOR FLAT CABLES with integral nylon spring

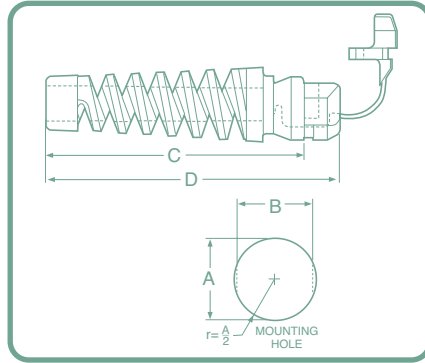

These nylon 6/6 UL and CSA approved parts protect the lifeline of your electrical/electronic products by absorbing forces of pull, push, twist and flex.

Add reliability, longevity and safety. Will pass CSA's 50,000 cycle 'vacuum cleaner' test. Securely anchors, insulates and protects cables at panel entry points.

Integral nylon spring eases the cable into a lazy bend and prevents sharp bending; assures longest cable and product life. They are not recommended for applications where the power supply cord is subject to whipping or 'jump rope' type motion.

Part No.	A Mounting Hole Dia.	B To Prevent Rotation	Maximum Thickness	UL Wire Designation	AWG/ Conductors	Approximate Size	C Extension Length	D Body Length
SR4N-7	.500	.465	.062	SPT-1	18/3	.12x.30	1.718	1.984
				SPT-2 & HPN	18/2	.15x.28		

Standard colours: Black. White and other colours available at premium charge if quantities are sufficient.

FOR ROUND CABLES with integral nylon spring

Part No.	A Mounting Hole Dia.	B To Prevent Rotation	Maximum Thickness	UL Wire Designation	AWG/ Conductors	Approximate Size	C Extension Length	D Body Length
SR5N-7	.500 -.515	.450	.062	SV & SVT	18/2	.250	1.703	1.984
				HPD	18/3	.255		
					18/2	.270		
					16/2	.290		
SR5P-7	Same as SR5N-7 except		.125				1.703	1.984
SR6N-7	.625	.550	.062	SJ,SJO&SJT	18/2	.300	1.718	2.109
SR6P-7	Same as SR6N-7 except		.125				1.718	2.109
SR6N3-7	.625	.550	.062	SJ, SJO & SJT	16/2	.315	1.718	2.109
					18/3	.320		
					14/2	.350		
					16/3	.355		
					18/4	.360		
SR6P3-7	Same as SR6N3-7 except		.125				1.718	2.109
SR7P-7	.750 -.781	.660	.125	SJT S & ST	18/4	.360	2.156	2.598
					14/3	.370		
					18/2	.390		
					18/3	.405		
					16/2	.405		
					16/3	.430		

Standard colours: Black. White and other colours available at premium charge if quantities are sufficient.