




Pipe Fittings CONTINUED

NIPPLES-REDUCER

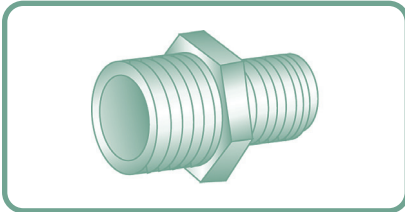

NOTES:

MPT – Male taper pipe thread
 FPT – Female taper pipe thread
 GHT – Garden hose thread


Temperature Ratings

HDPE: -55° to +90°C
 Nylon: -40° to +100°C

Part No.			
Nylon 6	Black HDPE	MPT	MPT
R 42	R 42 PE	1/4	1/8
R 62	R 62 PE	3/8	1/8
R 64	R 64 PE		1/4
R 82	R 82 PE	1/2	1/8
R 84	R 84 PE		1/4
R 86	R 86 PE		3/8
R 126	R 126 PE	3/4	3/8
R 128	R 128 PE		1/2
R G8	—	GHT	1/2
R G12	—		3/4

Minimum order 50.

REDUCER BUSHINGS

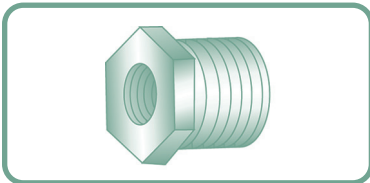

NOTES:

MPT – Male taper pipe thread
 FPT – Female taper pipe thread

Temperature Ratings

HDPE: -55° to +90°C
 Nylon: -40° to +100°C

Part No.			
Nylon 6	Black HDPE	MPT	FPT
RB 1418	RB 1418 PE	1/4	1/8
RB 3818	RB 3818 PE	3/8	1/8
RB 3814	RB 3814 PE		1/4
RB 1214	RB 1214 PE	1/2	1/4
RB 1238	RB 1238 PE		3/8
RB 3418	RB 3418 PE	3/4	1/8
RB 3414	RB 3414 PE		1/4
RB 3438	RB 3438 PE		3/8
RB 3412	RB 3412 PE		1/2
RB 1012	RB 1012 PE		1
RB 1034	RB 1034 PE	3/4	
RB 11434	RB 11434 PE	1-1/4	3/4
RB 1141	RB 1141 PE		1
RB 11234	RB 11234 PE	1-1/2	3/4
RB 1121	RB 1121 PE		1
RB 112114	RB 112114 PE		1-1/4
RB 2001	RB 2001 PE	2	1
RB 200114	RB 200114 PE		1-1/4
RB 200112	RB 200112 PE		1-1/2
RB 300200	RB 300200 PE	3	2

Minimum order 10.