



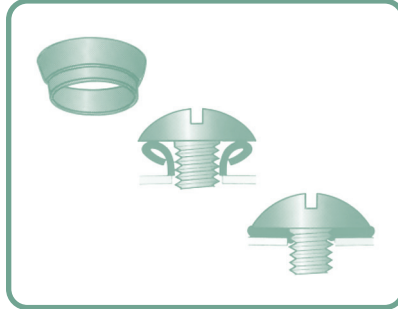

Nylon Turtleneck Products

LOCK SEAL WASHERS Tolerances: ID: + .004, -.003, Wall: ±.002, Height: +.025 -.015

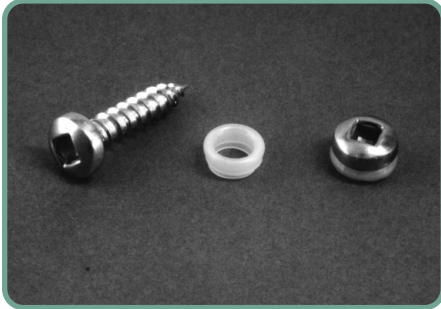

Use with metal fasteners to pressure-seal holes, as a great lockwasher, to prevent galvanic corrosion, to protect glass, porcelain, etc. surfaces from chipping, crazing or cracking. A problem solver.

Part No.	ID	Wall	Height
TW 4	.116	.013	.080
TW 6	.142	.015	.095
TW 8	.168	.015	.115
TW 10	.194	.017	.115
TW 1/4	.252	.020	.125
TW 5/16	.316	.020	.130
TW 3/8	.379	.020	.160
TW 1/2	.504	.022	.195
TW 5/8	.630	.025	.230
TW 3/4	.755	.028	.270

Minimum order 1000.

TURTLENECK BUSHINGS

With inside sleeve lengths of 1/4", 1/2" or 3/4", these have all the uses of the washer plus the function of a shoulder washer, screw insulator, or simply a bushing where space is restricted.

THIN WALL NYLON TUBING

The nylon tubing used to make the turtlenecks can be cut to your specifications.