


Adjustable Cable Clamps

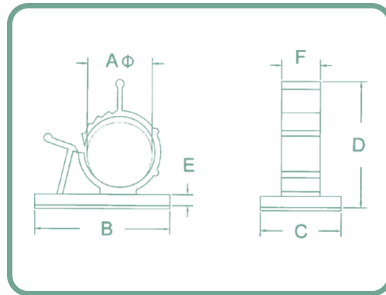


These UL approved black nylon adjustable cable clamps can accommodate various cables to save you money.

They are adhesive-backed and are easy to install, opening and closing for unlimited usage.

Part No.	A ID Range	B Length	C Width	D Height	E Base Thickness	F Clamp Width	Rated Static Load (lb.)
ACC 375	.311-.406	1.000	.752	.874	.063	.402	3/4
ACC 437	.394-.492	1.252	.752	1.094	.063	.402	1
ACC 562	.496-.606	1.461	.752	1.252	.118	.500	1
ACC 750	.650-.791	1.654	1.000	1.453	.118	.500	1-1/2
ACC 938	.827-.937	1.654	.850	1.689	.118	.445	1-3/8

Rated static loads apply for parts fastened to a flat, clean, dry surface and used within a temperature range of -30° to 65° C. We recommend clips be application-tested before being specified for production runs.

Nylon Adhesive C Clamps

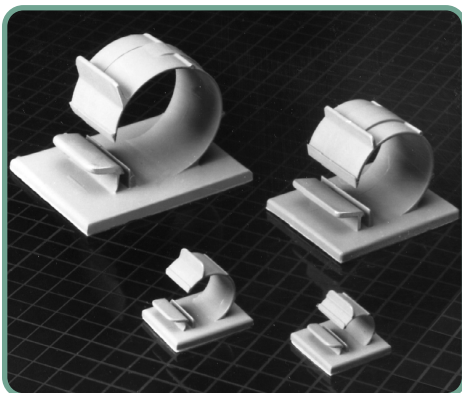

Exceptionally high performance clips use an easy-to-install adhesive mounting system to speed assembly, improve product appearance and to simplify wire run installations in almost any location. Convenient tabs allow for easy access to wire.

Recommended installation and storage temperatures are 15° to 27°C. Available in 94V-0 Polypropylene material for an additional charge. Add -V0 suffix to part number when ordering.

Part No	A	B	C	D	E	Max. Bundle Dia.	Rated Static Load (lb)
K21-0188	.740	.620	.080	.335	.390	3/16	1/2
021-0250	1.000	.870	.100	.420	.630	1/4	3/4
021-0375	1.000	1.000	.090	.500	.630	3/8	1
021-0500	1.000	1.210	.110	.680	.640	1/2	1-1/4
021-0750	1.150	1.450	.125	.990	.640	3/4	1-3/4
021-1000	1.980	2.240	.140	1.370	1.260	1	4
021-1500	2.420	2.950	.150	1.770	1.310	1-1/2	6

Colour: Gray (UL94V-2)

Rated static loads apply for parts fastened to a flat, clean, dry surface and used within a temperature range of -30° to 65° C. We recommend clips be application-tested before being specified for production runs.

Tolerance all dimensions: ± .030.

