


# Polyacetal T-Clips

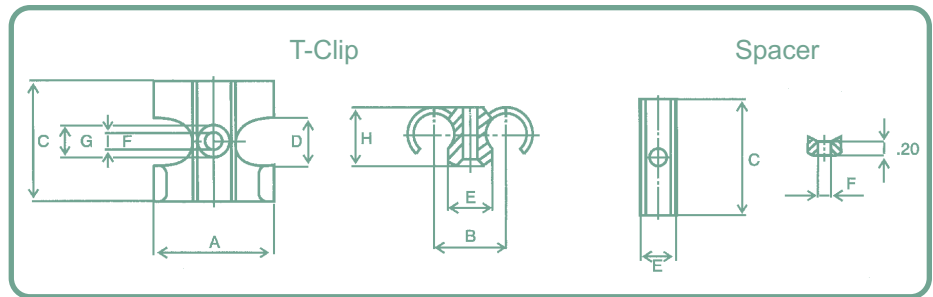

T-Clips provide a quick, adaptable and inexpensive answer to securing, attaching and routing of tubes, wires, hose and pipe. They are not only easy to use, but allow your installations to look extremely neat and professional. T-Clips provide uniform spacing to dual runs and can be

mounted on walls, cabinets, boards, enclosures and bulkheads. They are available in a wide range of sizes to fit almost any circular-sectioned item. A countersunk centre hole is provided for the fastener of your choice.

Many commercial applications, such as

the installation of hydraulic hoses, electrical conduit and wires, telephone and fibre optics, liquid and gas tubing and pipes, and automotive hoses can benefit from the ease of installation, safety and the final look of the job.

Part No.	Spacer No.*	Holding Range	A	B	C	D	E	F	G	H
TCLIP 4	—	5/32 - 1/4	.60	.40	.70	.24	.28	.12	.25	.36
TCLIP 6	—	1/4 - 5/16	.80	.48	.80	.32	.32	.12	.26	.36
TCLIP 8	D 8	5/16 - 3/8	1.00	.60	.96	.40	.40	.16	.32	.48
TCLIP 10	D 10	3/8 - 1/2	1.20	.74	1.10	.47	.44	.16	.32	.57
TCLIP 12	D 12	1/2 - 5/8	1.36	.82	1.33	.56	.46	.17	.36	.64
TCLIP 15	D 15	5/8 - 3/4	1.68	1.04	1.61	.68	.56	.20	.40	.80
TCLIP 18	D 18	3/4 - 7/8	2.20	1.24	1.88	.78	.64	.22	.44	.92
TCLIP 22	D 22	7/8 - 1	2.48	1.56	2.40	.92	.80	.25	.50	1.10
TCLIP 6-8		1/4 - 5/16 (one side) X 5/16 - 3/8 (other side)	1.37	1.00	.96	.28	.80	.160	.40	.47
TCLIP12H (Half Clip)		1/2 - 5/8	1.36	.82	.876	.493	.460	.138	.17	.64

**Standard Colour: Black.**

**A wide range of colours is available by special order.**

\*Spacers are available to fit T-Clips from numbers 8 to 22 to allow for additional spacing between the mounting face and the items to be secured. As many spacers as necessary can be used to provide required clearance, as the design allows stacking.

#### Specifications:

**Materials:** Polyacetal engineered plastic with ultraviolet inhibitors.

**Temperature Range:** -40° to 212°F, -40° to 100° C.

**Mounting:** Screw mount standard.