




Liquid Tight Connectors CONTINUED

QUICK TWIST - STRAIGHT SNAP-IN

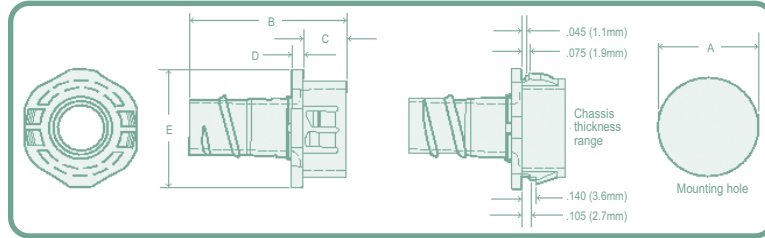

For use with Heyco Flex conduit and tubing. One-piece solution with smooth internal surfaces for easier wire routing, protection and installation.

All nylon construction resistant to salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.

Easy permanent assembly. Just twist the tubing over the connector ferrule until the tubing clicks into place. No tools required. Unique locking fingers will accommodate various chassis thicknesses.


Low cost electrical connector.

Part No.	Trade Size	A Mounting Hole Diameter	B Overall Length	C Body Length	D Wrenching Nuts	E Wrenching Flats
HFC1/4-S Twist	1/4	.540	1.330	.344	.090	.750
HFC3/8-S Twist	3/8	.875	1.376	.391	.090	1.000
HFC1/2-S Twist	1/2	.875	1.376	.391	.090	1.000
HFC3/4-S Twist	3/4	1.093	1.495	.390	.090	1.250

Standard Colours: Black or Gray.

Recognized under the Component Program of Underwriters' Laboratories File #E121095.

QUICK TWIST - STRAIGHT NPT THREAD

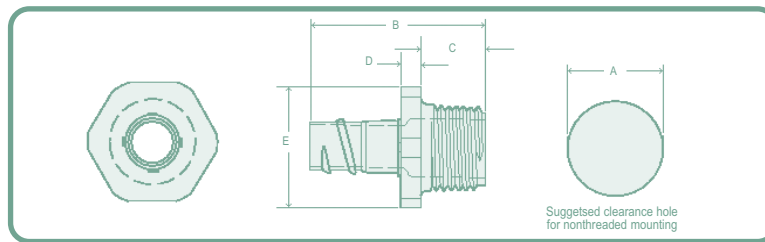

Part No.	Trade Size	A Clearance Hole	B Max. Overall Length	C Thread Length	D Wrenching Nuts	E Wrenching Flats
HFC1/4NPTTwist	1/4	.540	1.560	.465	.200	.750
HFC3/8NPTTwist	3/8	.875	1.720	.625	.200	1.180
HFC1/2NPTTwist	1/2	.875	1.720	.625	.200	1.180
HFC3/4NPTTwist	3/4	1.109	1.840	.625	.200	1.370

Standard Colours: Black or Gray.

Locknuts not included.

Listed under Underwriters' Laboratories File #E28430. UL approval pending for 1/4 NPT size.