



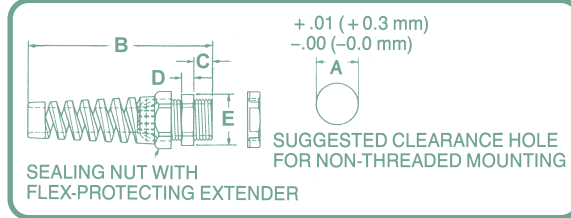

# Pigtail™ Liquid Tight Fittings

## PG HUBS FOR FLEXIBLE CORDS (LOCKNUTS INCLUDED)

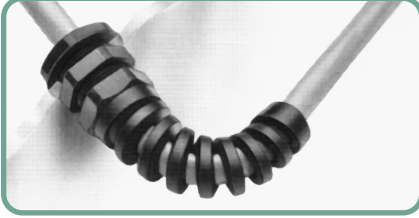

The Pigtail™ fitting has a flexible extender to prevent sharp bends and extend cable life.

Acme threads on body prevent skipping and speed installation. Also available in metric.

Part No.		Cable Dia. Range Min.- Max.	Thread Type & Size	A Clearance Hole	B Max. O.A. Length	C Thread Length	D Wrenching Nut Thick.	E Wrenching Flats
Black	Gray							
3237	3238	.114 -.250	Pg 7	.492	2.44	.33	.22	.59
3464	3465	.064 -.210						
3240	3241	.181 -.312	Pg 9	.599	2.77	.34	.20	.75
3466	3467	.069 -.187						
3243	3244	.230 -.395	Pg 11	.733	3.44	.39	.20	.86
3468	3469	.069 -.260						
3246	3247	.170 -.450	Pg 13.5	.804	3.88	.41	.20	.95
3249	3250	.230 -.546	Pg 16	.886	4.36	.45	.23	1.05
3245	3248	.450 -.709	Pg 21	1.115	5.03	.52	.23	1.30
3478	3479	.250 -.485						

To order locknuts separately, see page 92.

## NPT HUBS FOR FLEXIBLE CORDS (LOCKNUTS NOT INCLUDED)

Part No.		Cable Dia. Range Min.- Max.	Thread Type & Size	A Clearance Hole	B Max. O.A. Length	C Thread Length	D Wrenching Nut Thick.	E Wrenching Flats
Black	Gray							
3254	3255	.181 -.312	3/8 NPT	.670	2.97	.53	.20	.75
3474	3475	.069 -.187						
3251	3252	.170 -.470	1/2 NPT	.875	4.09	.62	.20	.95
3266	3267	.230 -.546						
3239	3242	.450 -.709	3/4 NPT	1.068	5.14	.63	.23	1.30
3462	3463	.250 -.485						

To order locknuts separately, see page 92.