
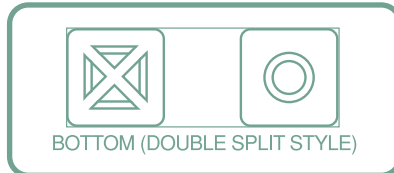
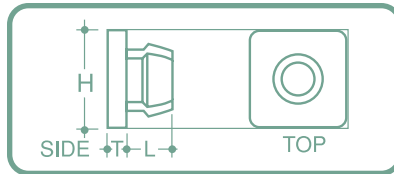


Nylon Expansion Nuts

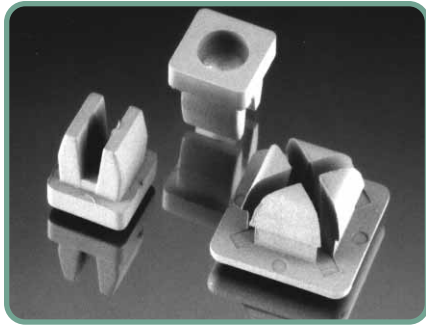

Used with self-threading metal screws, these snap-in nuts expand and securely lock screws and assembled parts in place, connecting thin-gauge materials and eliminating cross-threading. They are corrosion and vibration resistant. Design variation is available.

Square Head

Part No.	Square Hole Size	Panel Thickness	Screw Size	H Head Size	T Head Height	L Length
XN 1S	.275 -.290	.031 -.125	8 or 10	.375	.031	.320
XN 2S	.275 -.290	.031 -.125	8 or 10	.375	.062	.320
XN 4S	.275 -.290	.031 -.125	8 or 10	.375	.125	.320
XN 8S	.275 -.290	.031 -.125	8 or 10	.375	.250	.320
XN 10S	.250 -.255	.110 -.125	6	.375	.031	.265
XN 1014	.250 -.270	.062 -.155	6	.375	.032	.312
XN 22S	.350 -.355	.218 -.230	8 or 10	.475	.062	.421
XN 30S	.370 -.375	.031 -.100	12	.620	.080	.275

Double Split Square Head

XN 10DS	.377 -.382	.125 -.130	10	.609	.082	.308
XN 19DS	.305 -.310	.125 -.135	8	.437	.062	.281
XN 102S	.250 -.250	.093 -.275	8	.375	.047	.420
XN 1128	.330 -.330	.031 -.125	8	.505	.032	.275

Round Head

XN 4R	.271 -.290	.031 -.125	8-10	.500	.125	.320
XN 8R	.275 -.290	.031 -.125	8-10	.500	.250	.320
XN 38R	.275 -.290	.031 -.156	8	.500	.375	.320
XN 72R	.275 -.290	.031 -.156	8-10	.500	.708	.315
XN 220R	.425 -.429	.031 -.110	5/16	.740	.190	.312

Three Legged Square Head (Fits Round Hole)


XN 3300	.300 -.300	.031 -.135	6	.485	.055	.265
---------	------------	------------	---	------	------	------

Minimum order 1000 for all parts this page.



Nylon Expansion Nuts CONTINUED

CLOSED BOTTOM

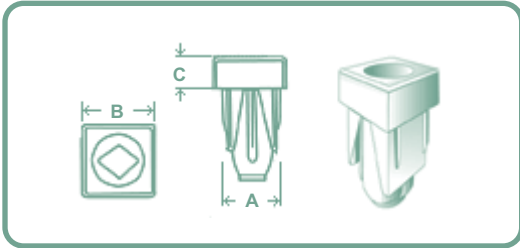

Provides the same advantage as our standard expansion nuts but with various head thicknesses and a closed bottom. This part can also be manufactured in Supertough Nylon to accommodate a #10 screw.

Part No.	A Hole Size	Panel Thickness	Screw Size	B Head Dimension	C Head Thickness	Length
XN 651	.281	.020 -.140	6-8	.375	.062	.430
XN 718	.281	.020 -.140	6-8	.375	.187	.430
XN 773	.281	.020 -.140	6-8	.375	.500	.430
XN 811	.281	.020 -.140	6-8	.375	.312	.430
XN 1241	.281	.020 -.140	6-8	.375	.125	.430
XN 1315	.281	.010 -.140	6-8	.375	.500	.430

Minimum order 1000.