




# Grommeting

## EXTRUDED SERRATED POLYETHYLENE

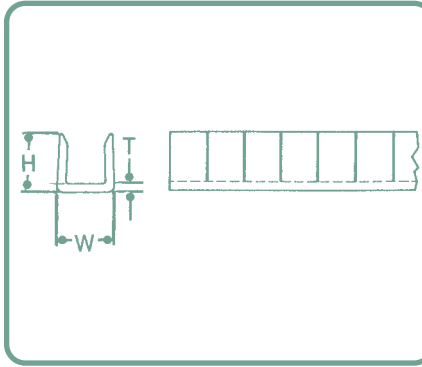

Use grommeting to protect tubes, wires and cables from becoming frayed or cut by sharp panel edges. Makes bushings for all sizes and shapes of panel cutouts in sheet metal, glass, wood panels or other sheet-form materials. No tools required—just cut to size and insert. Depending on the panel thickness, grommeting may grip tightly by itself, or it may need a touch of epoxy to keep it in place.

Part No.	Max. Chassis Thickness	H	W	T
GRPE 40	.040	.190	.125	.040
GRPE 52	.052	.190	.125	.040
GRPE 62	.062	.200	.170	.045
GRPE 85	.085	.200	.170	.045
GRPE 100	.100	.220	.210	.045
GRPE 125	.125	.220	.205	.050
GRPE 187	.187	.270	.275	.050
GRPE 250	.250	.280	.370	.050

Minimum order 1 roll. Sold in rolls of 100 ft. only.  
Standard colour: Natural.

## CONTINUOUS SERRATED NYLON

Part No.	Max. Chassis Thickness	H	W	T
GR 40	.040	.190	.125	.040
GR 52	.052	.190	.125	.040
GR 62	.062	.200	.170	.045
GR 85	.085	.200	.170	.045
GR 100	.100	.220	.210	.045
GR 125	.125	.220	.205	.050
GR 187	.187	.270	.272	.050
GR 250	.250	.280	.370	.050

Minimum order 1 roll. Sold in rolls of 100 ft. only.  
Standard colour: Black or natural white. Specify colour when ordering.