



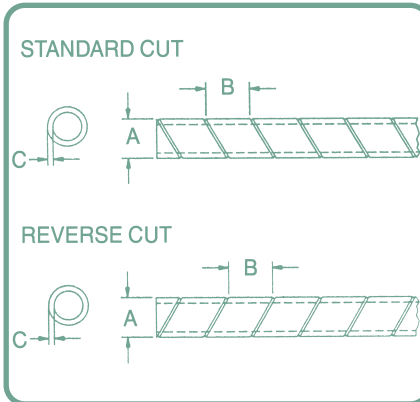

SPIRAL-CUT CABLE WRAP

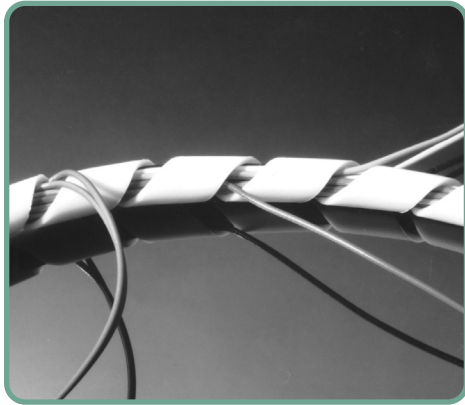

Wraps on like tape. Easy to remove and re-use. Allows branch-outs and break-outs of single/multiple wires and re-routing of replacement wires. The strong grip holds wires firmly while still allowing flexibility. Prevents kinking or curling of wires. Absorbs vibration, insulates cables and protects wires and tubes from abrasion.

Stocked in standard cut, but also available in reverse (opposite) cut at no additional charge. Reverse cut must be specified at time of order.

Polyethylene

Part No. Natural	Part No. UV Black	Part No. Fire-Resistant	Bundle Range		A-Outside Diameter	B Pitch	C Thickness
			Minimum Diameter	Maximum Diameter			
CFX 1 PE	CFX 1 PE UV	CFX 1 PE FR	1/16	1/2	.125	.187	.032
CFX 1.5 PE	CFX 1.5 PE UV	CFX 1.5 PE FR	1/8	1-1/2	.187	.187	.031
CFX 2 PE	CFX 2 PE UV	CFX 2 PE FR	3/16	2	.250	.375	.045
CFX 3 PE	CFX 3 PE UV	CFX 3 PE FR	5/16	3	.375	.438	.052
CFX 4 PE	CFX 4 PE UV	CFX 4 PE FR	3/8	4	.500	.500	.062
CFX 5 PE	CFX 5 PE UV	CFX 5 PE FR	1/2	4-1/2	.625	.625	.062
CFX 6 PE	CFX 6 PE UV	CFX 6 PE FR	3/4	5	.750	.750	.065
CFX 8 PE	CFX 8 PE UV	CFX 8 PE FR	1	7	1.000	1.000	.095

Minimum order 1 roll.

Also available: Fluorescent colours (red, green, yellow) for extra visibility in potentially hazardous situations.

Natural Nylon

Part No.	Bundle Range		A-Outside Diameter	B Pitch	C Thickness
	Minimum Diameter	Maximum Diameter			
CFX 1 NY	1/16	1/2	.125	.187	.015
CFX 1.5 NY	1/8	1-1/2	.187	.187	.020
CFX 2 NY	3/16	2	.250	.375	.025
CFX 3 NY	5/16	3	.375	.438	.035
CFX 4 NY	3/8	4	.500	.500	.034
CFX 5 NY	1/2	4-1/2	.625	.625	.032
CFX 6 NY	1/2	5	.750	.750	.032
CFX 8 NY	1	7	1.000	1.000	.032

Minimum order 1 roll.