




Liquid Tight Connectors CONTINUED

QUICK TWIST - SWEEP SNAP-IN

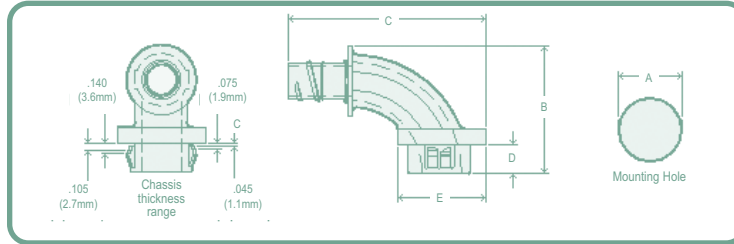

For use with Heyco Flex conduit and tubing. One-piece solution with smooth internal surfaces for easier wire routing, protection and installation around corner angles.

All nylon construction resistant to salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.

No tools needed. Twist the tubing over connector ferrule until the tubing 'clicks' into place. Unique locking fingers accommodate various chassis thicknesses.


Low cost electrical connector.

| Part No. | Trade Size | A Mounting Hole Diameter | B Overall Height | C Overall Length | D Body Length | E Flange Diameter |
|-------------------|------------|--------------------------------|------------------------|------------------------|---------------------|-------------------------|
| HFC3/8-S-90 Twist | 3/8 | .875 | 1.754 | 2.749 | .390 | 1.230 |
| HFC1/2-S-90 Twist | 1/2 | .875 | 1.754 | 2.749 | .390 | 1.230 |
| HFC3/4-S-90 Twist | 3/4 | 1.093 | 1.965 | 3.081 | .390 | 1.500 |

Standard Colours: Black or Gray.

Recognized under the Component Program of Underwriters' Laboratories File #E121095.

QUICK TWIST - SWEEP NPT THREAD

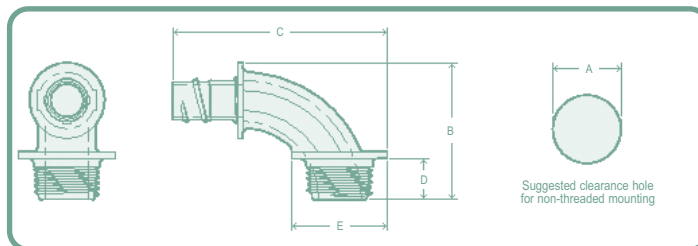

| Part No. | Trade Size | A Clearance Hole | B Overall Height | C Overall Length | D Thread Length | E Flange Diameter |
|--------------------|------------|------------------------|------------------------|------------------------|-----------------------|-------------------------|
| HFC3/8NPT-90 Twist | 3/8 | .875 | 1.754 | 2.749 | .521 | 1.230 |
| HFC1/2NPT-90 Twist | 1/2 | .875 | 1.754 | 2.749 | .521 | 1.230 |
| HFC3/4NPT-90 Twist | 3/4 | 1.109 | 2.105 | 3.081 | .530 | 1.500 |

Standard Colours: Black or Gray.

Locknuts not included.

Listed under Underwriters' Laboratories File #E28430.