



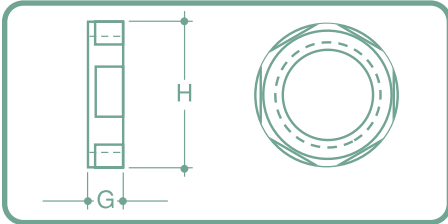

Locknuts

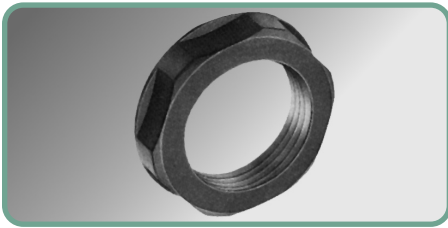

| Part No. | Thread Type & Size | G | H |
|---------------------------------|--------------------|------|-------|
| National Pipe Threads | | | |
| NLN1/4NPT | 1/4 NPT | .265 | .748 |
| NLN3/8NPT | 3/8 NPT | .265 | 1.058 |
| NLN1/2NPT | 1/2 NPT | .265 | 1.058 |
| NLN3/4NPT | 3/4 NPT | .265 | 1.312 |
| NLN1NPT | 1 NPT | .265 | 1.605 |
| NLN1-1/4NPT | 1-1/4 NPT | .281 | 1.968 |
| PG Threads per DIN 40430 | | | |
| NLNPG7 | PG 7 | .218 | .750 |
| NLNPG9 | PG 9 | .218 | .859 |
| NLNPG11 | PG 11 | .218 | .937 |
| NLNPG13.5 | PG 13.5 | .250 | 1.062 |
| NLNPG16 | PG 16 | .250 | 1.171 |
| NLNPG21 | PG 21 | .281 | 1.406 |
| NLNPG29 | PG 29 | .281 | 1.812 |
| NLNPG36 | PG 36 | .281 | 2.244 |
| NLNPG42 | PG 42 | .328 | 2.600 |
| NLNPG48 | PG 48 | .328 | 3.060 |


Minimum order 100.

Standard colours: Black or Gray.

Also available in metal and nickel-plated brass.



Sealing Washers

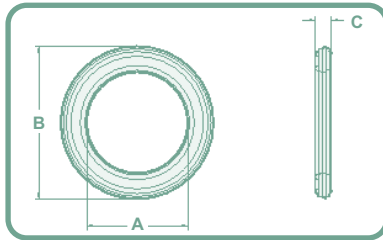

Manufactured of Thermoplastic Elastomer, these washers have special double sealing ridges to compensate for minor unevenness at enclosure. Suitable for wet locations requiring a separate gasket between the box and fitting.

Liquid tight, dust tight and oil tight at enclosure.

Easy to install since washers seal off on the perimeter, not on the connector threads.

| Part No. | Fits Electrical Fitting Trade Size NPT | A Inside Diameter | B Outside Diameter | C Thickness |
|----------|--|-------------------|--------------------|-------------|
| SW1/4 | 1/4 | .540 | .796 | .125 |
| SW3/8 | 3/8 | .670 | 1.010 | .125 |
| SW1/2 | 1/2 | .820 | 1.240 | .125 |
| SW3/4 | 3/4 | 1.030 | 1.500 | .135 |
| SW1 | 1 | 1.315 | 1.770 | .160 |
| SW1-1/4 | 1-1/4 | 1.680 | 1.990 | .160 |