


Armour (Anti-Short) Bushings

Used at entrance to flexible metallic conduit or armoured cable. Insulates and protects electrical wires from being cut by rough conduit ends. Chamfered lead-in allows for fast installation. Also used in holes through which ropes and steel cables pass, to prevent chafing, cutting or scraping, where bushing space is very limited. Suitable for installation at temperatures as low as -40°F.

Part No.	Fits These Armoured Cables	Fits Cable ID		A Inside Diameter		B Head Diameter		C Overall Height	
		in	mm	in	mm	in	mm	in	mm
AB0	14/2, 14/3, 12/2, 12/3	.290-.330	7.37-8.38	0.37	9.4	0.68	17.3	0.58	14.7
AB1	14/4, 6/1, 4/1	.330-.420	8.38-10.67	0.44	11.2	0.70	17.8	0.63	16.0
AB2	12/4, 10/2, 10/3, 2/1	.430-.570	10.92-14.48	0.57	14.5	0.85	21.6	0.61	15.5
AB3	10/4, 8/2, 8/3, 1/1	.580-.720	14.73-18.29	0.73	18.5	1.02	25.9	0.70	17.8

Standard colour: Red
Minimum order 1000.

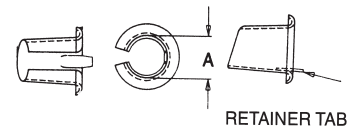

Countless Possibilities, Millions Of Solutions
(416) 242-6811