


Bell-Mouth Strain Relief Bushings

For Flat Cables

These nylon 6/6 UL and CSA approved parts protect the lifeline of your electrical/electronic products by absorbing forces of pull, push, twist and flex.

Securely anchors, insulates and protects cables at panel entry points.

Flared trumpet exit eases the cable into a lazy bend, prevents sharp bending and assures longer cable and product life.

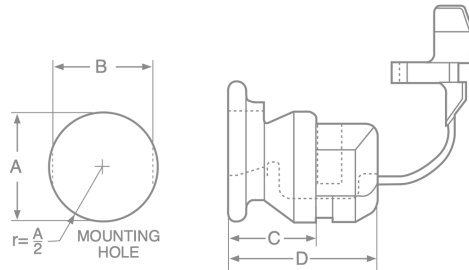

Part No.	A Mounting Hole Dia. (In)	A Mounting Hole Dia. (mm)	B To Prevent Rotation (In)	B To Prevent Rotation (mm)	Maximum Thickness (In)	Maximum Thickness (mm)	UL Wire Designation	AWG/ Conductors	Approximate Size (In)	Approximate Size (mm)	C Head Length (In)	C Head Length (mm)	D Body Length (In)	D Body Length (mm)	
SR2P-5	0.375	9.53	0.330	8.38	0.062	1.57	Clock	20/2	.09x.18	2.29x4.57	0.375	9.53	0.625	15.88	
							SPT-2	18/2	.11x.21	2.79x5.33					
SR3P-5	0.437	11.10	0.390	9.91	0.620	15.75	SPT-1	18/2	.12x.22	3.05x5.59	0.375	9.53	0.625	15.88	
SR4N-5	0.500	12.70	0.465	11.81	0.620	15.75	SPT-1	18/3	.12x.30	3.05x7.62	0.406	10.31	0.703	17.86	
	0.500	12.70						SPT-2 & HPN	18/2	.15x.28					3.81x7.11
	.500 -.515	12.70 - 13.08						16/2	.16x.30	4.06x7.62					
SR6K-5	0.625	15.88	0.550	13.97	0.125	3.18	HPN	18/3	.15x.34	3.81x8.64	0.406	10.31	0.813	20.65	
								16/3	.16x.37	4.06x9.40					
								SPT-2	16/2	.16x.30					4.06x7.62
								16/3	.16x.41	4.06x10.41					

Countless Possibilities, Millions Of Solutions
(416) 242-6811