


## Snap-In

All nylon construction resists salt water, gasoline, oil, alcohol, weak acids, grease and common solvents.

Assembly friendly! Just push the conduit or tubing onto the ferrule, then tighten the domed sealing nut. Completed assembly can then be snapped into the chassis with fingertip pressure. No threading of the conduit or tubing required, eliminating the possibility of cutting the conduit and creating leak paths. Suitable for indoor/outdoor use. Completely reusable.

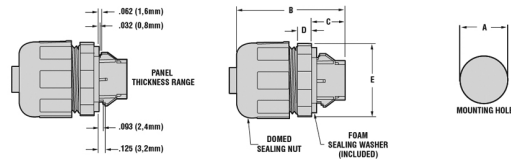

Part No.	Fits Conduit Trade Size (fraction)	Fits Conduit Trade Size (In)	Fits Conduit Trade Size (mm)	A mounting Hole Diameter (In)	A mounting Hole Diameter (mm)	B Max OA length (In)	B Max OA length (mm)	C Body Length (In)	C Body Length (mm)	D Wrenching Nut Thickness (In)	D Wrenching Nut Thickness (mm)	E Wrenching Flats (In)	E Wrenching Flats (mm)
HFC1/4-S*	1/4	0.250	6.35	0.500	12.70	1.500	38.10	0.445	11.30	0.219	5.56	0.875	22.23
HFC3/8-S	3/8	0.375	9.53	0.875	22.23	2.000	50.80	0.625	15.88	0.250	6.35	1.328	33.73
HFC1/2-S	1/2	0.500	12.70	0.875	22.23	2.000	50.80	0.625	15.88	0.250	6.35	1.328	33.73
HFC3/4-S	3/4	0.750	19.05	1.090	27.69	2.031	51.59	0.625	15.88	0.250	6.35	1.562	39.67
HFC1-S	1	1.000	25.40	1.375	34.93	2.250	57.15	0.781	19.84	0.250	6.35	1.812	46.02

Standard colour: Black

\* recognized only, File #E121095. Consult customer service for chassis thickness range.

Countless Possibilities, Millions Of Solutions  
**(416) 242-6811**