


Sweep

All the same functions as the straight connectors but offer more flexibility. Complete connector is reusable. Smooth internal surfaces for easier wire installation.

Black connectors provided with nylon locknut, packed separately. Use of a sealing washer may be required for wet locations. Gray connectors provided with assembled o-ring and metal locknut.

Suitable for indoor/outdoor use, for original equipment manufacturers or field installers.

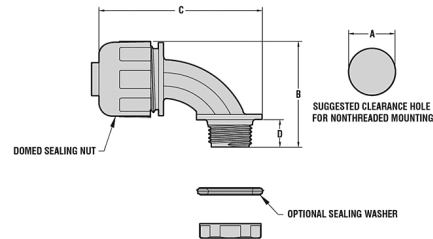

Part No.	Fits Conduit Trade Size (fraction)	Fits Conduit Trade Size (In)	Fits Conduit Trade Size (mm)	Thread Size	A Clearance Hole (In)	A Clearance Hole (mm)	B Max OA Height (In)	B Max OA Height (mm)	C Max OA Length (In)	C Max OA Length (mm)	D Thread Length (In)	D Thread Length (mm)	Sealing Washer
HFC3/8-90R*	3/8	0.375	9.53	1/2-NPT	0.875	22.23	1.980	50.29	2.910	73.91	0.520	13.21	SW1/2
HFC1/2-90R*	1/2	0.500	12.70	1/2-NPT	0.875	22.23	1.980	50.29	2.910	73.91	0.520	13.21	SW1/2
HFC3/4-90R*	3/4	0.750	19.05	3/4-NPT	1.109	28.17	2.290	58.17	3.170	80.52	0.520	13.21	SW3/4
HFC1-90R*	1	1.000	25.40	1-NPT	1.375	34.93	2.830	71.88	3.960	100.58	0.690	17.53	SW1
HFC1-1/4-90R	1-1/4	1.250	31.75	1-1/4-NPT	1.688	42.88	4.350	110.49	4.710	119.63	0.640	16.26	--
HFC1-1/2-90R	1-1/2	1.500	38.10	1-1/2-NPT	1.938	49.23	4.460	113.28	4.690	119.13	0.660	16.76	--
HFC2-90R	2	2.000	50.80	2-NPT	2.375	60.33	4.870	123.70	5.310	134.87	0.670	17.02	--

Standard colour: Black or Gray.

Sizes larger than 1" are manufactured in PVC.

*UL and CSA Approved.

Countless Possibilities, Millions Of Solutions
(416) 242-6811