


Nylon Cable Clamps

Cable clamps now also available in narrower (5/32" wide) format as well as wider (7/8") from 1/16" to 3/8" diameter.

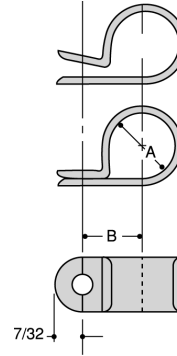

Part No.		Mounting Hole Diameter		Part Dimension A		Center-to-Center Dimension B	
Black	White	in	mm	in	mm	in	mm
Light Duty-3/8" wide, .050" thick							
3362	3312	0.170	4.3	0.125	3.18	0.360	9.14
3363	3313			0.187	4.75	0.390	9.91
3364	3314			0.25	6.35	0.42	10.67
3365	3315			0.312	7.92	0.46	11.68
3366	3316			0.375	9.53	0.49	12.45
3367	3317			0.437	11.10	0.530	13.46
3368	3318			0.5	12.70	0.55	13.97
3352	3302			0.203	5.2	0.125	3.18
3353	3303	0.187	4.75			0.38	9.65
3354	3304	0.250	6.35			0.41	10.41
3355	3305	0.312	7.92			0.44	11.18
3356	3306	0.375	9.53			0.48	12.19
3357	3307	0.437	11.10			0.51	12.95
3358	3308	0.500	12.70			0.53	13.46

Countless Possibilities, Millions Of Solutions
(416) 242-6811

Heavy Duty - 1/2" (12,7 mm) wide, .06" (1,5 mm) thick							
3372	3322	0.203	5.2	0.125	3.18	0.37	9.40
3373	3323			0.187	4.75	0.41	10.41
3374	3324			0.25	6.35	0.44	11.18
3375	3325			0.31	7.92	0.48	12.19
3376	3326			0.38	9.53	0.51	12.95
3377	3327			0.437	11.10	0.54	13.72
3378	3328			0.5	12.70	0.58	14.73
3379	3329			0.562	14.27	0.61	15.49
3380	3330			0.625	15.88	0.65	16.51
3381	3331			0.687	17.45	0.68	17.27
3382	3332			0.75	19.05	0.71	18.03
3383	3333			0.812	20.62	0.75	19.05
3384	3334			0.875	22.23	0.78	19.81
3390	3340			1	25.40	0.85	21.59
3392	3342			1.125	28.58	0.92	23.37
3393	3343			1.187	30.15	0.95	24.13
3394	3344			1.25	31.75	0.99	25.15
3396	3346	1.375	34.93	1.05	26.67		
3398	3348	1.5	38.10	1.12	28.45		

Recognized under the Component Program of Underwriters Laboratory File #E-54523
 Conform to the following Mil spec: Mil Std 24E, Mil C-21565 (NAS), Mil P-17091-B

Countless Possibilities, Millions Of Solutions
(416) 242-6811

62 Densley Avenue, Toronto, Ontario Canada M6M 5E1

cordscanada.com