


Releasable

Ideal for use in prototype construction and in areas requiring servicing or addition of wires in existing situations.

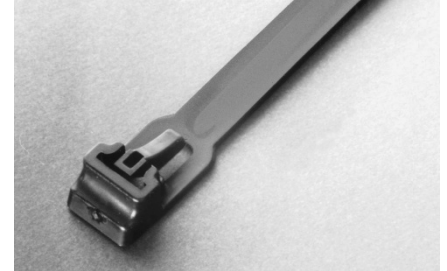

| Part No. | Overall Length (fraction) | Overall Length (In) | Overall Length (mm) | Maximum Bundle Diameter (fraction) | Maximum Bundle Diameter (In) | Maximum Bundle Diameter (mm) | Tensile Strength (lbs.) |
|-----------|---------------------------|---------------------|---------------------|------------------------------------|------------------------------|------------------------------|-------------------------|
| RT-5-50 | 5-1/2 | 5.500 | 139.70 | 1-1/4 | 1.250 | 31.75 | 50 |
| RT-6-50 | 6-1/2 | 6.500 | 165.10 | 1-3/8 | 1.375 | 34.93 | 50 |
| RT-8-50 | 8-1/2 | 8.500 | 215.90 | 2 | 2.000 | 50.80 | 50 |
| RT-9-50 | 10 | 10.000 | 254.00 | 2-1/2 | 2.500 | 63.50 | 50 |
| RT-15-150 | 15 | 15.000 | 381.00 | 4 | 4.000 | 101.60 | 175 |
| RT-21-150 | 21 | 21.000 | 533.40 | 6 | 6.000 | 152.40 | 175 |
| RT-32-150 | 32 | 32.000 | 812.80 | 9 | 9.000 | 228.60 | 175 |
| RT-9-250 | 9 | 9.000 | 228.60 | 2 | 2.000 | 50.80 | 250 |
| RT-20-250 | 20 | 20.000 | 508.00 | 5 | 5.000 | 127.00 | 250 |
| RT-22-250 | 23 | 23.000 | 584.20 | 6 | 6.000 | 152.40 | 250 |
| RT-29-250 | 29 | 29.000 | 736.60 | 8 | 8.000 | 203.20 | 250 |
| RT-35-250 | 35 | 35.000 | 889.00 | 10 | 10.000 | 254.00 | 250 |
| RT-41-250 | 40 | 40.000 | 1016.00 | 12 | 12.000 | 304.80 | 250 |

Minimums available on request.

Countless Possibilities, Millions Of Solutions
(416) 242-6811