
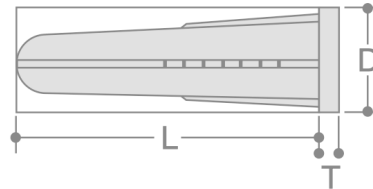


Nylon Wall Plugs (SCREW ANCHORS)

The expanded rim prevents the loss of the wall plugs inside the hole. Non-twist fins keep them firmly in place and stop rotation. For use with wood, concrete, tile, brick, sheet metal. Use with wood or sheet metal screws.



Part No.	Drill (fraction)	D (In)	D (mm)	L (fraction)	L (In)	L (mm)	D (fraction)	D (In)	D (mm)	T (in)	T (fraction)
WP-6-8	3/16	0.188	4.76	7/8	0.875	22.23	5/16	0.313	7.94	0.370	9.40
WP-10-12	1/4	0.250	6.35	11/16	0.688	17.46	3/8	0.375	9.53	0.370	9.40
WP-14-16	5/16	0.313	7.94	1-3/8	1.375	34.93	7/16	0.438	11.11	0.370	9.40

Minimum order 1000

Can be colour-coded (not colour-matched) where quantities warrant.

Countless Possibilities, Millions Of Solutions
(416) 242-6811