




Pigtail™ Liquid Tight Fittings

The Pigtail™ fitting has a flexible extender to prevent sharp bends and extend cable life.
 Acme threads on body prevent skipping and speed installation.
 Also available in metric.

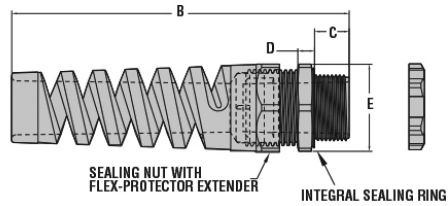

NPT Hubs For Flexible Cords (Locknuts Not Included)

Part No.	Black	Gray	Cable Dia. Range Min.- Max. (In)	Cable Dia. Range Min.- Max. (mm)	Thread Type & Size	A Clearance Hole (In)	A Clearance Hole (mm)	B Max. O.A. Length (In)	B Max. O.A. Length (mm)	C Thread Length (In)	C Thread Length (mm)	D Wrenching Nut Thick. (In)	D Wrenching Nut Thick. (mm)	E Wrenching Flats (In)	E Wrenching Flats (mm)
3254	3255	.181 -.312	4.60 - 7.92	3/8-NPT	0.670	17.02	2.970	75.44	0.530	13.46	0.200	5.08	0.750	19.05	
3474	3475	.069 -.187	1.75 - 4.75	3/8-NPT	0.670	17.02	2.970	75.44	0.530	13.46	0.200	5.08	0.750	19.05	
3251	3252	.170 -.470	4.32 - 11.94	1/2-NPT	0.875	22.23	4.090	103.89	0.620	15.75	0.200	5.08	0.950	24.13	
3266	3267	.230 -.546	5.84 - 13.87	1/2-NPT	0.875	22.23	4.540	115.32	0.620	15.75	0.230	5.84	1.050	26.67	
3239	3242	.450 -.709	11.43 - 18.01	3/4-NPT	1.068	27.13	5.140	130.56	0.630	16.00	0.230	5.84	1.300	33.02	
3462	3463	.250 -.485	6.35 - 12.32	3/4-NPT	1.068	27.13	5.140	130.56	0.630	16.00	0.230	5.84	1.300	33.02	

Countless Possibilities, Millions Of Solutions
(416) 242-6811