


Pigtail™ Liquid Tight Fittings

The Pigtail™ fitting has a flexible extender to prevent sharp bends and extend cable life.
Acme threads on body prevent skipping and speed installation.
Also available in metric.

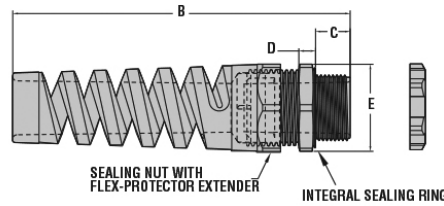

PG Hubs For Flexible Cords (Locknuts Included)

Part No.	Cable Dia. Range		Thread Type & Size	A Clearance Hole (In)	A Clearance Hole (mm)	B Max. O.A. Length (In)	B Max. O.A. Length (mm)	C Thread Length (In)	C Thread Length (mm)	D Wrenching Nut Thick. (In)	D Wrenching Nut Thick. (mm)	E Wrenching Flats (In)	E Wrenching Flats (mm)	
	Black	Gray												Min.- Max. (In)
3237	3238	.114 -.250	2.90-6.35	Pg-7	0.492	12.50	2.44	61.98	0.330	8.38	0.220	5.59	0.590	14.99
3464	3465	.064 -.210	1.63-5.33	Pg-7	0.492	12.50	2.44	61.98	0.330	8.38	0.220	5.59	0.590	14.99
3240	3241	.181 -.312	4.60-7.92	Pg-9	0.599	15.21	2.77	70.36	0.340	8.64	0.200	5.08	0.750	19.05
3466	3467	.069 -.187	1.75-4.75	Pg-9	0.599	15.21	2.77	70.36	0.340	8.64	0.200	5.08	0.750	19.05
3243	3244	.230 -.395	5.84-10.03	Pg-11	0.733	18.62	3.44	87.38	0.390	9.91	0.200	5.08	0.860	21.84
3468	3469	.069 -.260	1.75-6.60	Pg-11	0.733	18.62	3.44	87.38	0.390	9.91	0.200	5.08	0.860	21.84
3246	3247	.170 -.450	4.32-11.43	Pg-13.5	0.804	20.42	3.88	98.55	0.410	10.41	0.200	5.08	0.950	24.13
3249	3250	.230 -.546	5.84-13.87	Pg-16	0.886	22.50	4.36	110.74	0.450	11.43	0.230	5.84	1.050	26.67
3245	3248	.450 -.709	11.43-18.01	Pg-21	1.115	28.32	5.03	127.76	0.520	13.21	0.230	5.84	1.300	33.02
3478	3479	.250 -.485	6.35-12.32	Pg-21	1.115	28.32	5.03	127.76	0.520	13.21	0.230	5.84	1.300	33.02

Countless Possibilities, Millions Of Solutions
(416) 242-6811