


T-Clips provide a quick, adaptable and inexpensive answer to securing, attaching and routing of tubes, wires, hose and pipe. They are not only easy to use, but allow your installations to look extremely neat and professional. T-Clips provide uniform spacing to dual runs and can be mounted on walls, cabinets, boards, enclosures and bulkheads. They are available in a wide range of sizes to fit almost any circular-sectioned item. A countersunk centre hole is provided for the fastener of your choice.

Many commercial applications, such as the installation of hydraulic hoses, electrical conduit and wires, telephone and fibre optics, liquid and gas tubing and pipes, and automotive hoses can benefit from the ease of installation, safety and the final look of the job.

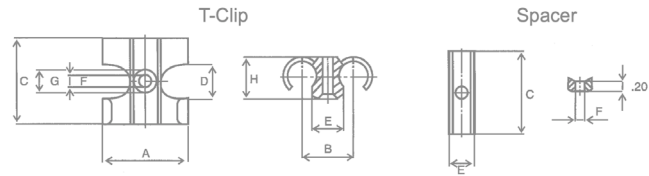

COMPNO	STKNO	ATRIBUT	Value	Unit Measure
D	TCLIP-4	Spacer No*	—	
D	TCLIP-4	Holding Range	5/32 - 1/4	in
D	TCLIP-4	A (in)	0.600	in
D	TCLIP-4	A (mm)	15.24	mm
D	TCLIP-4	B (in)	0.400	in
D	TCLIP-4	B (mm)	10.16	mm
D	TCLIP-4	C (in)	0.700	in
D	TCLIP-4	C (mm)	17.78	mm
D	TCLIP-4	D (in)	0.240	in
D	TCLIP-4	D (mm)	6.10	mm
D	TCLIP-4	E (in)	0.280	in
D	TCLIP-4	E (mm)	7.11	mm
D	TCLIP-4	F (in)	0.120	in
D	TCLIP-4	F (mm)	3.05	mm
D	TCLIP-4	G (in)	0.250	in
D	TCLIP-4	G (mm)	6.35	mm
D	TCLIP-4	H (in)	0.360	in

Countless Possibilities, Millions Of Solutions
(416) 242-6811

D	TCLIP-4	H (mm)	9.14	mm
D	TCLIP-6	Spacer No*	—	
D	TCLIP-6	Holding Range	1/4 - 5/16	in
D	TCLIP-6	A (in)	0.800	in
D	TCLIP-6	A (mm)	20.32	mm
D	TCLIP-6	B (in)	0.480	in
D	TCLIP-6	B (mm)	12.19	mm
D	TCLIP-6	C (in)	0.800	in
D	TCLIP-6	C (mm)	20.32	mm
D	TCLIP-6	D (in)	0.320	in
D	TCLIP-6	D (mm)	8.13	mm
D	TCLIP-6	E (in)	0.320	in
D	TCLIP-6	E (mm)	8.13	mm
D	TCLIP-6	F (in)	0.120	in
D	TCLIP-6	F (mm)	3.05	mm
D	TCLIP-6	G (in)	0.260	in
D	TCLIP-6	G (mm)	6.60	mm
D	TCLIP-6	H (in)	0.360	in
D	TCLIP-6	H (mm)	9.14	mm
D	TCLIP-8	Spacer No*	D8	
D	TCLIP-8	Holding Range	5/16 - 3/8	in
D	TCLIP-8	A (in)	1.000	in
D	TCLIP-8	A (mm)	25.40	mm
D	TCLIP-8	B (in)	0.600	in
D	TCLIP-8	B (mm)	15.24	mm
D	TCLIP-8	C (in)	0.960	in
D	TCLIP-8	C (mm)	24.38	mm
D	TCLIP-8	D (in)	0.400	in
D	TCLIP-8	D (mm)	10.16	mm
D	TCLIP-8	E (in)	0.400	in
D	TCLIP-8	E (mm)	10.16	mm
D	TCLIP-8	F (in)	0.160	in
D	TCLIP-8	F (mm)	4.06	mm
D	TCLIP-8	G (in)	0.320	in
D	TCLIP-8	G (mm)	8.13	mm
D	TCLIP-8	H (in)	0.480	in
D	TCLIP-8	H (mm)	12.19	mm
D	TCLIP-10	Spacer No*	D-10	

Countless Possibilities, Millions Of Solutions
(416) 242-6811

D	TCLIP-10	Holding Range	3/8 - 1/2	in
D	TCLIP-10	A (in)	1.200	in
D	TCLIP-10	A (mm)	30.48	mm
D	TCLIP-10	B (in)	0.740	in
D	TCLIP-10	B (mm)	18.80	mm
D	TCLIP-10	C (in)	1.100	in
D	TCLIP-10	C (mm)	27.94	mm
D	TCLIP-10	D (in)	0.470	in
D	TCLIP-10	D (mm)	11.94	mm
D	TCLIP-10	E (in)	0.440	in
D	TCLIP-10	E (mm)	11.18	mm
D	TCLIP-10	F (in)	0.160	in
D	TCLIP-10	F (mm)	4.06	mm
D	TCLIP-10	G (in)	0.320	in
D	TCLIP-10	G (mm)	8.13	mm
D	TCLIP-10	H (in)	0.570	in
D	TCLIP-10	H (mm)	14.48	mm
D	TCLIP-12	Spacer No*	D-12	
D	TCLIP-12	Holding Range	1/2 - 5/8	in
D	TCLIP-12	A (in)	1.360	in
D	TCLIP-12	A (mm)	34.54	mm
D	TCLIP-12	B (in)	0.820	in
D	TCLIP-12	B (mm)	20.83	mm
D	TCLIP-12	C (in)	1.33	in
D	TCLIP-12	C (mm)	33.782	mm
D	TCLIP-12	D (in)	0.56	in
D	TCLIP-12	D (mm)	14.224	mm
D	TCLIP-12	E (in)	0.46	in
D	TCLIP-12	E (mm)	11.684	mm
D	TCLIP-12	F (in)	0.17	in
D	TCLIP-12	F (mm)	4.318	mm
D	TCLIP-12	G (in)	0.36	in
D	TCLIP-12	G (mm)	9.144	mm
D	TCLIP-12	H (in)	0.64	in
D	TCLIP-12	H (mm)	16.256	mm
D	TCLIP-15	Spacer No*	D-15	
D	TCLIP-15	Holding Range	5/8 - 3/4	in
D	TCLIP-15	A (in)	1.68	in

Countless Possibilities, Millions Of Solutions
(416) 242-6811

D	TCLIP-15	A (mm)	42.672	mm
D	TCLIP-15	B (in)	1.04	in
D	TCLIP-15	B (mm)	26.416	mm
D	TCLIP-15	C (in)	1.61	in
D	TCLIP-15	C (mm)	40.894	mm
D	TCLIP-15	D (in)	0.68	in
D	TCLIP-15	D (mm)	17.272	mm
D	TCLIP-15	E (in)	0.56	in
D	TCLIP-15	E (mm)	14.224	mm
D	TCLIP-15	F (in)	0.2	in
D	TCLIP-15	F (mm)	5.08	mm
D	TCLIP-15	G (in)	0.4	in
D	TCLIP-15	G (mm)	10.16	mm
D	TCLIP-15	H (in)	0.8	in
D	TCLIP-15	H (mm)	20.32	mm
D	TCLIP-18	Spacer No*	D-18	
D	TCLIP-18	Holding Range	3/4 - 7/8	in
D	TCLIP-18	A (in)	2.2	in
D	TCLIP-18	A (mm)	55.88	mm
D	TCLIP-18	B (in)	1.24	in
D	TCLIP-18	B (mm)	31.496	mm
D	TCLIP-18	C (in)	1.88	in
D	TCLIP-18	C (mm)	47.752	mm
D	TCLIP-18	D (in)	0.78	in
D	TCLIP-18	D (mm)	19.812	mm
D	TCLIP-18	E (in)	0.64	in
D	TCLIP-18	E (mm)	16.256	mm
D	TCLIP-18	F (in)	0.22	in
D	TCLIP-18	F (mm)	5.588	mm
D	TCLIP-18	G (in)	0.44	in
D	TCLIP-18	G (mm)	11.176	mm
D	TCLIP-18	H (in)	0.92	in
D	TCLIP-18	H (mm)	23.368	mm
D	TCLIP-22	Spacer No*	D-22	
D	TCLIP-22	Holding Range	7/8 - 1	in
D	TCLIP-22	A (in)	2.48	in
D	TCLIP-22	A (mm)	62.992	mm

Countless Possibilities, Millions Of Solutions
(416) 242-6811

D	TCLIP-22	B (in)	1.56	in
D	TCLIP-22	B (mm)	39.624	mm
D	TCLIP-22	C (in)	2.4	in
D	TCLIP-22	C (mm)	60.96	mm
D	TCLIP-22	D (in)	0.92	in
D	TCLIP-22	D (mm)	23.368	mm
D	TCLIP-22	E (in)	0.8	in
D	TCLIP-22	E (mm)	20.32	mm
D	TCLIP-22	F (in)	0.25	in
D	TCLIP-22	F (mm)	6.35	mm
D	TCLIP-22	G (in)	0.5	in
D	TCLIP-22	G (mm)	12.7	mm
D	TCLIP-22	H (in)	1.1	in
D	TCLIP-22	H (mm)	27.94	mm
D	TCLIP-6-8	Spacer No*	—	
D	TCLIP-6-8	Holding Range	1/4 - 5/16 (one side) X 5/16 - 3/8 (other side)	in
D	TCLIP-6-8	A (in)	1.37	in
D	TCLIP-6-8	A (mm)	34.798	mm
D	TCLIP-6-8	B (in)	1	in
D	TCLIP-6-8	B (mm)	25.4	mm
D	TCLIP-6-8	C (in)	0.96	in
D	TCLIP-6-8	C (mm)	24.384	mm
D	TCLIP-6-8	D (in)	0.28	in
D	TCLIP-6-8	D (mm)	7.112	mm
D	TCLIP-6-8	E (in)	0.8	in
D	TCLIP-6-8	E (mm)	20.32	mm
D	TCLIP-6-8	F (in)	0.16	in
D	TCLIP-6-8	F (mm)	4.064	mm
D	TCLIP-6-8	G (in)	0.4	in
D	TCLIP-6-8	G (mm)	10.16	mm
D	TCLIP-6-8	H (in)	0.47	in
D	TCLIP-6-8	H (mm)	11.938	mm
D	TCLIP12H	Spacer No*	—	
D	TCLIP12H	Holding Range	1/2 - 5/8	in
D	TCLIP12H	A (in)	1.360	in
D	TCLIP12H	A (mm)	34.54	mm

Countless Possibilities, Millions Of Solutions
(416) 242-6811

D	TCLIP12H	B (in)	0.820	in
D	TCLIP12H	B (mm)	20.83	mm
D	TCLIP12H	C (in)	0.876	in
D	TCLIP12H	C (mm)	22.25	mm
D	TCLIP12H	D (in)	0.493	in
D	TCLIP12H	D (mm)	12.52	mm
D	TCLIP12H	E (in)	0.460	in
D	TCLIP12H	E (mm)	11.68	mm
D	TCLIP12H	F (in)	0.138	in
D	TCLIP12H	F (mm)	3.51	mm
D	TCLIP12H	G (in)	0.170	in
D	TCLIP12H	G (mm)	4.32	mm
D	TCLIP12H	H (in)	0.640	in
D	TCLIP12H	H (mm)	16.26	mm
D	TCLIP-4	Material	Polyacetal	
D	TCLIP-6	Material	Polyacetal	
D	TCLIP-8	Material	Polyacetal	
D	TCLIP-10	Material	Polyacetal	
D	TCLIP-12	Material	Polyacetal	
D	TCLIP-15	Material	Polyacetal	
D	TCLIP-18	Material	Polyacetal	
D	TCLIP-22	Material	Polyacetal	
D	TCLIP-6-8	Material	Polyacetal	
D	TCLIP12H	Material	Polyacetal	
D	TCLIP-4	Colour	Black	
D	TCLIP-6	Colour	Black	
D	TCLIP-8	Colour	Black	
D	TCLIP-10	Colour	Black	
D	TCLIP-12	Colour	Black	
D	TCLIP-15	Colour	Black	
D	TCLIP-18	Colour	Black	
D	TCLIP-22	Colour	Black	
D	TCLIP-6-8	Colour	Black	
D	TCLIP12H	Colour	Black	

Standard Colour: Black.

A wide range of colours is available by special order.

*Spacers are available to fit T-Clips from numbers 8 to 22 to allow for additional spacing between the mounting face and the items to be secured. As many spacers as necessary can be used to provide required clearance, as the design allows stacking.

Specifications:

Materials: Polyacetal engineered plastic with ultraviolet inhibitors.

Temperature Range: -40° to 212°F, -40° to 100° C.

Mounting: Screw mount standard.

Countless Possibilities, Millions Of Solutions
(416) 242-6811

62 Densley Avenue, Toronto, Ontario Canada M6M 5E1

cordscanada.com