




Right-Angle Liquid Tight Fittings

Each cordgrip is moulded in the open position for ease of installation. After cable insertion, the fitting snaps closed, bending the cable without damage, saving considerable time and money.

Part design provides liquid tight integrity even in the open position. Acme threads on body prevent skipping and speed installation. All-nylon with TPE gland, resists salt water, weak acids, gasoline, oil, alcohol, grease and common solvents. This feature is not assessed by UL certification and testing.

Available in metric.

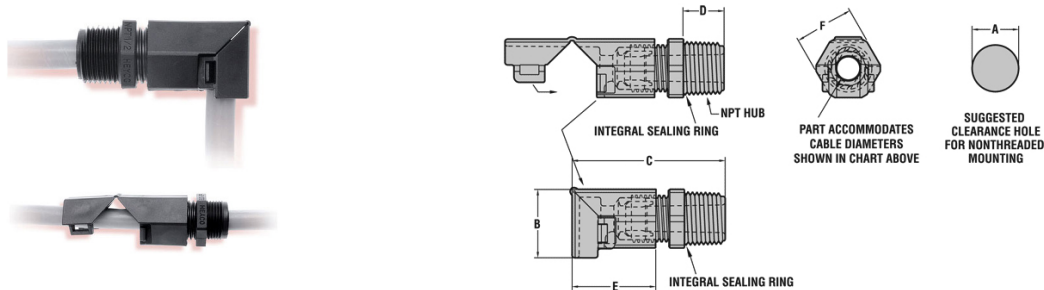

NPT Hubs For Flexible Cords (Locknuts Not Included)

Part No.	Cable Dia. Range Min.-Max. (In)	Cable Dia. Range Min.-Max. (mm)	Thread Type & Size	A Clearance Hole (In)	A Clearance Hole (mm)	B Right Angle Ht. (In)	B Right Angle Ht. (mm)	C (Closed) Max. O.A Length (In)	C (Closed) Max. O.A Length (mm)	D Thread Length (In)	D Thread Length (mm)	E Sealing Nut Length (In)	E Sealing Nut Length (mm)	F Wrenching Flats (In)	F Wrenching Flats (mm)	
																Black
†M4560	†M4561	.065-.220	1.65-5.59	1/4-90-NPT	0.540	13.72	0.690	17.53	1.660	42.16	0.450	11.43	0.860	21.84	0.630	16.00
†M4562	†M4563	.115-.250	2.92-6.35	1/4-90-NPT	0.540	13.72	0.690	17.53	1.660	42.16	0.450	11.43	0.860	21.84	0.630	16.00
†M8560	†M8561	.069-.187	1.75-4.75	3/8-90-NPT	0.670	17.02	0.880	22.35	1.960	49.78	0.530	13.46	1.070	27.18	0.750	19.05
†M8562	†M8563	.181-.305	4.60-7.75	3/8-90-NPT	0.670	17.02	0.880	22.35	1.960	49.78	0.530	13.46	1.070	27.18	0.750	19.05
†M4564	†M4565	.095-.260	2.41-6.60	1/2-90-NPT	0.875	22.23	1.060	26.92	2.400	60.96	0.620	15.75	1.380	35.05	0.950	24.13
**M8564	**M8565	.170-.450	4.32-11.43	1/2-90-NPT	0.875	22.23	1.060	26.92	2.400	60.96	0.620	15.75	1.380	35.05	0.950	24.13

†US and foreign patents pending.

**UL Listed Underwriters Laboratories.

Countless Possibilities, Millions Of Solutions
(416) 242-6811

62 Densley Avenue, Toronto, Ontario Canada M6M 5E1

cordscanada.com