




# Right-Angle Liquid Tight Fittings

Each cordgrip is moulded in the open position for ease of installation. After cable insertion, the fitting snaps closed, bending the cable without damage, saving considerable time and money.

Part design provides liquid tight integrity even in the open position. Acme threads on body prevent skipping and speed installation. All-nylon with TPE gland, resists salt water, weak acids, gasoline, oil, alcohol, grease and common solvents. This feature is not assessed by UL certification and testing.

Available in metric.

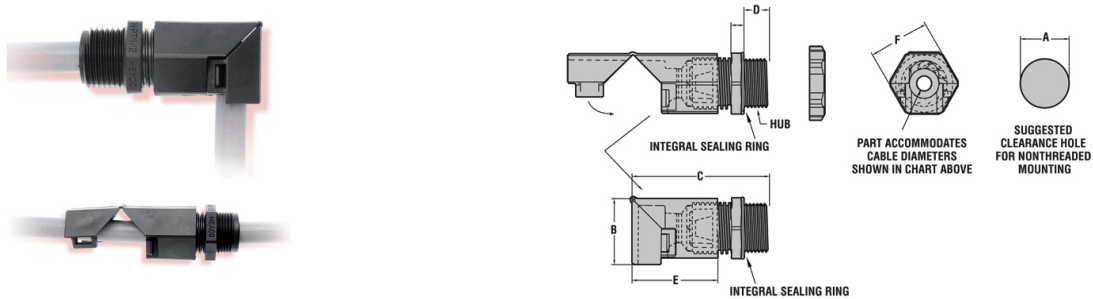

## PG Hubs For Flexible Cords (Locknuts Included)

Part No.		Cable Dia. Range Min.-Max. (In)	Cable Dia. Range Min.-Max. (mm)	Thread Type & Size	A Clearance Hole (In)	A Clearance Hole (mm)	B Right Angle Ht. (In)	B Right Angle Ht. (mm)	C (Closed) Max. O.A Length (In)	C (Closed) Max. O.A Length (mm)	D Thread Length (In)	D Thread Length (mm)	E Sealing Nut Length (In)	E Sealing Nut Length (mm)	F Wrenching Flats (In)	F Wrenching Flats (mm)
Black	Gray															
†M8530	†M8531	.062 -.210	1.57- 5.33	PG7-90	0.492	12.50	0.690	17.53	1.530	38.86	0.330	8.38	0.860	21.84	0.590	14.99
†M8532	†M8533	.114 -.250	2.90- 6.35	PG7-90	0.492	12.50	0.690	17.53	1.530	38.86	0.330	8.38	0.860	21.84	0.590	14.99
†M8534	†M8535	.069 -.187	1.75- 4.75	PG9-90	0.599	15.21	0.880	22.35	1.770	44.96	0.340	8.64	1.070	27.18	0.750	19.05
†M8536	†M8537	.181 -.305	4.60- 7.75	PG9-90	0.599	15.21	0.880	22.35	1.770	44.96	0.340	8.64	1.070	27.18	0.750	19.05
†M8538	†M8539	.078 -.260	1.98- 6.60	PG11-90	0.733	18.62	0.990	25.15	1.990	50.55	0.390	9.91	1.230	31.24	0.860	21.84
†M8540	†M8541	.230 -.375	5.84- 9.53	PG11-90	0.733	18.62	0.990	25.15	1.990	50.55	0.390	9.91	1.230	31.24	0.860	21.84
†M4542	†M4553	.095 -.260	2.41- 6.60	PG13.5- 90	0.804	20.42	1.060	26.92	1.060	26.92	0.410	10.41	1.380	35.05	0.950	24.13
**M8542	**M8543	.170 -.470	4.32- 11.94	PG13.5- 90	0.804	20.42	1.060	26.92	1.060	26.92	0.410	10.41	1.380	35.05	0.950	24.13

Countless Possibilities, Millions Of Solutions  
**(416) 242-6811**