


Manufactured of Thermoplastic Elastomer, these washers have special double sealing ridges to compensate for minor unevenness at enclosure. Suitable for wet locations requiring a separate gasket between the box and fitting.
Liquid tight, dust tight and oil tight at enclosure.
Easy to install since washers seal off on the perimeter, not on the connector threads.

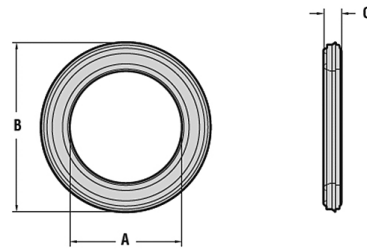

Part No.	Fits Electrical Fitting Trade Size NPT (fraction)	Fits Electrical Fitting Trade Size NPT (In)	Fits Electrical Fitting Trade Size NPT (mm)	A Inside Diameter (In)	A Inside Diameter (mm)	B outside Diameter (In)	B outside Diameter (mm)	C Thickness (In)	C Thickness (mm)
SW1/4	1/4	0.250	6.35	0.540	13.72	0.796	20.22	0.125	3.18
SW3/8	3/8	0.375	9.53	0.670	17.02	1.010	25.65	0.125	3.18
SW1/2	1/2	0.500	12.70	0.820	20.83	1.240	31.50	0.125	3.18
SW3/4	3/4	0.750	19.05	1.030	26.16	1.500	38.10	0.135	3.43
SW1	1	1.000	25.40	1.315	33.40	1.770	44.96	0.160	4.06
SW1-1/4	1-1/4	1.250	31.75	1.680	42.67	1.990	50.55	0.160	4.06

Countless Possibilities, Millions Of Solutions
(416) 242-6811