


Straight-Thru Strain Relief Bushings

The original strain relief—the first and still the best.

Moulded of nylon 6/6 and UL and CSA certified, these strain reliefs protect the lifeline of your electronic/electrical products by absorbing the forces of push, pull and twist that may be exerted on the flexible power cord.

They securely anchor, insulate and protect cables at panel entry points.

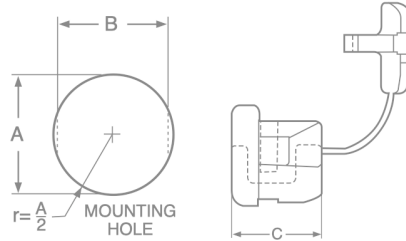

For Flat Cables

Part No.	A Mounting Hole Dia. (In)	A Mounting Hole Dia. (mm)	B To Prevent Rotation (In)	B To Prevent Rotation (mm)	Maximum Thickness (In)	Maximum Thickness (mm)	UL Wire Designation	AWG/Conductors	Approximate Size (In)	Approximate Size (mm)	C Body Length (In)	C Body Length (mm)
SR2P-4	0.375	9.53	0.345	8.76	0.062	1.57	Clock	2/20	.09x.18	2.29x4.57	0.406	10.31
							SPT-1	18/2	.11x.21	2.79x5.33	0.406	10.31
SR2L-1	Same as SR2P-4 except				0.125	3.18						
SR3A-4	0.437	11.10	0.39	9.91	.040*	1.02	SPT-1	18/2	.12x.22	3.05x5.59	0.406	10.31
SR3P-4	Same as SR3A-4 except				0.062	1.57					0.406	10.31
SR3W-1	Same as SR3A-4 except				0.100	2.54					0.406	10.31
SR3L-1	Same as SR3A-4 except				0.156	3.96					0.406	10.31
SR4P-4	0.500	12.70	0.445	11.30	0.100	2.54	SPT-1	18/2	.12x.22	3.05x5.59	0.440	11.18
SR4N-4	0.500	12.70	0.465	11.81	0.062	1.57	SPT-1	18/3	.12x.30	3.05x7.62	0.406	10.31
							HPN	18/2	.15x.28	3.81x7.11		

Countless Possibilities, Millions Of Solutions
(416) 242-6811

SR4K-4	Same as SR4N-4 except				0.100	2.54						
SR4L-4	Same as SR4N-4 except				0.156	3.96						
SR4K-1	0.500	12.70	0.46	11.68	0.095	2.41	SPT-1	18/3	.12x.30	3.05x7.62	0.500	12.70
	.500 -.515	12.70 - 13.08	0.46	11.68			SPT-2 & HPN	18/2	.15x.28	3.81x7.11		
							HPN	18/3	.15x.34	3.81x8.64		
							SPT-2 & HPN	16/2	.16x.30	4.06x7.62		
SR4L-1	Same as SR4K-1 except				0.187	4.75						
SR5KN-4	0.562	14.27	0.53	13.46	0.062	1.57	SPT-3	18/2	.19x.35	4.83x8.89	0.609	15.47
							SPT-3	16/2	.20x.37	5.08x9.40		
							SPT-2	18/3	.15x.40	3.81x10.16		
							SPT-2	16/3	.16x.41	4.06x10.41		
SR5K-4	Same as SRKN-4 except				0.125	3.18						
SR6N4-4	0.625	15.88	0.55	13.97	0.062	1.57	SPT-2	18/3	.15x.40	3.81x10.16	0.578	14.68
							SPT-2	16/3	.16x.41	4.06x10.41		
SR6P4-4	Same as SR6N4-4 except				0.125	3.18						
SR5W-1	0.562	14.27	0.53	13.46	0.125	3.18	HPN &	16/3	.16x.37	4.06x9.40	0.609	15.47
							SPT-2	18/3	.15x.40	3.81x10.16		
								16/3	.16x.41	4.06x10.41		
SR30-1**	.560**	14.22**	.730**	18.54**	0.125	3.18	SPT-2	18/3	.15x.40	3.81x10.16	0.672	17.07
								16/3	.16x.41	4.06x10.41		
							SPT-3	18/2	.19x.35	4.83x8.89		
								18/3	.19x.39	4.83x9.91		
								16/2	.20x.37	5.08x9.40		
								16/3	.20x.43	5.08x10.92		
SR33-1**	.750**	19.05**	.875**	22.23**	0.125	3.18	SPT-3	16/2	.20x.37	5.08x9.40	0.781	19.84
								16/3	.20x.43	5.08x10.92		
								14/2	.24x.42	6.10x10.67		
								14/3	.24x.51	6.10x12.95		
SR34-2	.875	22.23	.840	21.34	0.125	3.18	SPT-3	14/2	.24x.42	6.10x10.67	0.813	20.65

Countless Possibilities, Millions Of Solutions
(416) 242-6811

								14/3	.24x.51	6.10x12.95		
								12/2	.29x.51	7.37x12.95		
								12/3	.29x.65	7.37x16.51		
SR31-2	.875	22.23	.840	21.34	0.125	3.18	SPT-3	12/3	.32x.65	8.13x16.51	0.813	20.65
								10/3	.32x.65	8.13x16.51		
SR300-1**	0.375	9.53	.625-.640	15.88 - 16.26	0.156	3.96	300 OHM†		.06x.40	1.52x10.16	0.469	11.91
	0.375	9.53					SPT-1	18/3	.12x.30	3.05x7.62		
	0.390	9.91							.12x.30	3.05x7.62		
	0.415	10.54					SPT-2	18.3	.15x.40	3.81x10.16		
	0.422	10.72							.15x.40	3.81x10.16		
	0.422	10.72						16/3	.16x.41	4.06x10.41		
	0.437	11.10							.16x.41	4.06x10.41		
SR302-1**	Same as SR300-1 except				0.100	2.54					0.469	11.91

Standard colours: Black. White and other colours available at premium charge if quantities are sufficient.

*To install strain reliefs for .040" maximum panel thickness, use R291 hand pliers.

**Use elongated hole.

†Wire is not UL/CSA covered.

Countless Possibilities, Millions Of Solutions
(416) 242-6811

62 Densley Avenue, Toronto, Ontario Canada M6M 5E1

cordscanada.com