



Use with corresponding nuts for longer length or non-standard bolts. Can be bent with heat to form U-bolts or other shapes.

As well as the materials and sizes shown here, threaded rod is available in teflon, polypropylene, delrin, CPVC and Kynar, as well as some metric sizes. Call us for a quote.

FRP (Fibreglass-Reinforced Vinyl Ester)

| Part No. | Size (fraction) | Size (in) | Size (mm) | Recomm. Max. Installation Torque (ft./lb.) |
|------------|-----------------|-----------|-----------|--|
| TR-3/8-16F | 3/8-16 | 0.375 | 9.53 | 4 |
| TR-1/2-13F | 1/2-13 | 0.500 | 12.70 | 8 |
| TR-5/8-11F | 5/8-11 | 0.625 | 15.88 | 16 |
| TR-3/4-10F | 3/4-10 | 0.750 | 19.05 | 24 |
| TR-1"-8F | 1"-8 | 1.000 | 25.40 | 50 |

Sold in 4-foot lengths only. Minimums on request.
Glass-filled polyphenyl sulphide nuts are available.

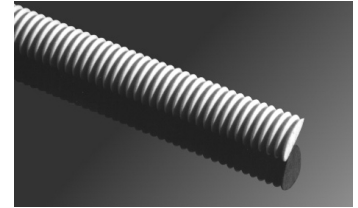

Countless Possibilities, Millions Of Solutions
(416) 242-6811