


# Miniature Locking Sleeves

Locking sleeves enable barbed fittings to be used at up to 100% of the rated burst pressure of the flexible plastic tubing. To use, simply slide appropriate sleeve over suggested OD tubing, insert miniature barbed fitting into tubing, slide sleeve back over barb. Soft tubing locks onto the self-sealing barb.

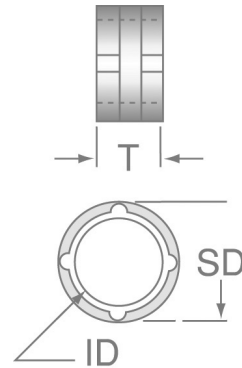

Part No.	Tube OD - Fraction	Tube OD (in)	Tube OD (mm)	SD (in)	SD (mm)	T (in)	T (mm)	ID (in)	ID (mm)	Material	Colour
LS-125	1/8	0.125	3.18	0.310	7.87	0.245	6.22	0.147	3.73	Nylon	Natural
LS-156	5/32	0.156	3.97	0.375	9.53	0.281	7.14	0.176	4.47	Nylon	Natural
LS-187	3/16	0.188	4.76	0.400	10.16	0.300	7.62	0.215	5.46	Nylon	Natural
LS-250	1/4	0.250	6.35	0.435	11.05	0.315	8.00	0.260	6.60	Nylon	Natural
LS-375	3/8	0.375	9.53	0.625	15.88	0.375	9.53	0.425	10.80	Nylon	Natural

Minimum order 1000.

**Countless Possibilities, Millions Of Solutions**  
**(416) 242-6811**