


Heyco® Quarter-Turn Mount Wire Clips - CHQTM-5 L

Wire Management & Cable Protection.




Features & Benefits


- All new Quarter-Turn Mount (QTM-5) products, designed to work with the standard Powermation rail and racking systems for industrial automation and robotics workstations.
- QTM-5 could be used in any 1/2" T-Slot racking or rail system from other manufacturers.
- Simple application by hand with quick twist 90° swivel for friction fit hold in place – high pull out retention.
- Simply twist to remove for routing and location adjustment.
- Material choices cover a number of application requirements for flammability and temperature.
- Gather and direct single or bundles of wires at low cost.
- Vertical for top entry and narrow width for easy application of wires and small footprint.
- Latch gate locks cables in place.
- Latch gate releasable for repair, replace or addition to previously placed wires.

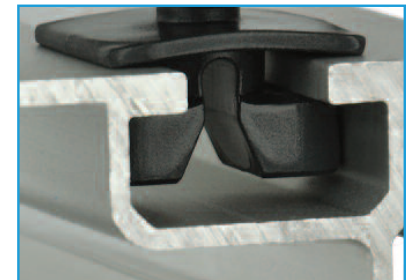

WIRE CAPACITY		PART NO.			DESCRIPTION	PART DIMENSION					
in.	mm.	Nylon 6/6 Natural	HS Nylon 6/6 Black	VO Nylon 6/6 Black		A Height		B Width		C Depth	
						in.	mm.	in.	mm.	in.	mm.
.44 x .14	11,1 x 3,6	4421	4421B	4421F	CHQTM-5 L-12	.50	12,7	.61	15,5	.22	5,6
.44 x .33	11,1 x 8,4	4426	4426B	4426F	CHQTM-5 L-18	.74	18,8				
.44 x .69	11,1 x 17,5	4431	4431B	4431F	CHQTM-5 L-27	1.09	27,7				
.44 x 1.00	11,1 x 25,4	4436	4436B	4436F	CHQTM-5 L-35	1.40	35,6				

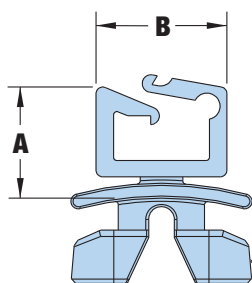

**FOR USE WITH
1/2" T-SLOTS**

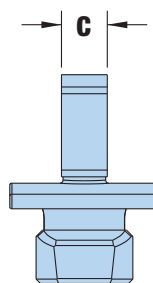

Material Quick Specs:

Material :	Natural 6/6	Black Heat Stable / UV Stable Nylon	Black Nylon 6/6
Flammability Rating:	UL 94 V-2	UL 94 V-2	UL 94 V-0
Temperature Range	32°F (0°C) to 185°F (85°C)	-40°F (-40°C) to 239°F (115°C)	-40°F (-40°C) to 185°F (85°C)

Visit our blog for more information.