


# Heyco® Crimpless SunBundler

Crimpless PVC Coated Stainless Steel Wire Cable Ties.  
Solar Wire Management.

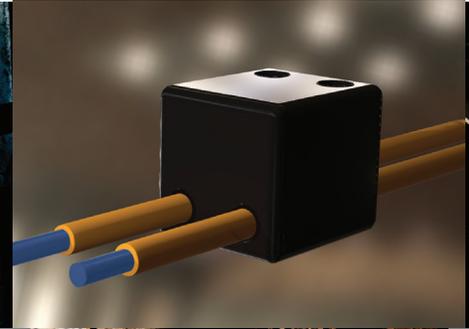

## Features & Benefits


- Fast and easy installation.
- No crimping required.
- Crimpless design minimizes repetitive strain on the installer.
- Releasable and reusable for easy repositioning during install.
- Releasable and reusable for cable repair and replacement for long-term economic viability.
- Cube manufactured from F1-rated Nylon 6/6. UV and heat stable for outdoor use and harsh environments.
- UV protected vinyl jacket ideal for solar installation where product durability is required.
- Smooth vinyl jacketing prevents damage to cable insulation.



For more information, specifications, or to place an order, visit our website or contact our sales team. To order, [click here](#), or call us at 800.363.5080.

## Specifications

### Crimpless PVC Coated Stainless Steel Wire Cable Ties.

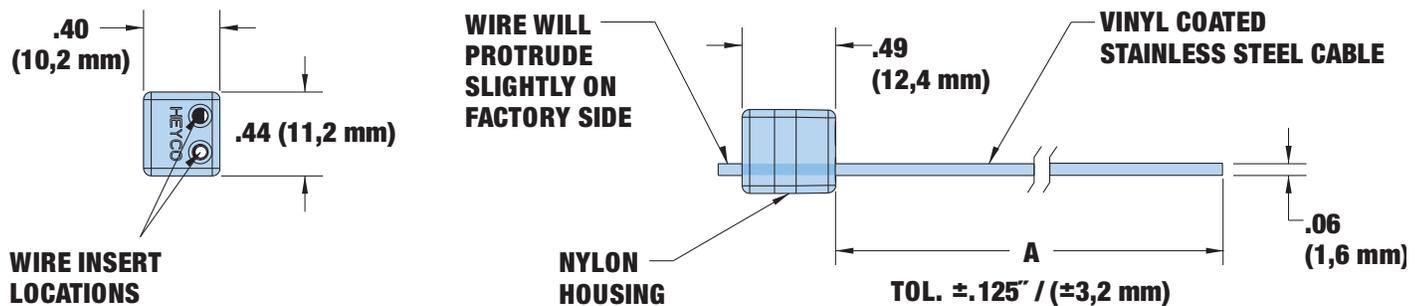

## Specifications

### Crimpless PVC Coated Stainless Steel Wire Cable Ties.

MAX. TENSILE STRENGTH		MAX. BUNDLE DIAMETER		PART NO. Black		DESCRIPTION	PART DIMENSION (A) Length	
Lbs.	N	in.	mm.	100 Pack	Bulk		Tol. $\pm 125$ / $\pm 3,2$ mm	in.
125	560	.95	24,1	<b>S6804</b>	<b>S6805</b>	Crimpless SunBundler® 4	4	102
		1.55	39,4	<b>S6806</b>	<b>S6807</b>	Crimpless SunBundler® 6	6	152
		2.30	58,4	<b>S6808</b>	<b>S6809</b>	Crimpless SunBundler® 8	8	203
		2.95	74,2	<b>S6810</b>	<b>S6811</b>	Crimpless SunBundler® 10	10	254
		3.88	98,6	<b>S6812</b>	<b>S6813</b>	Crimpless SunBundler® 12	12	305
		4.20	106,7	<b>S6814</b>	<b>S6815</b>	Crimpless SunBundler® 14	14	356
		6.36	161,5	<b>S6820</b>	<b>S6821</b>	Crimpless SunBundler® 20	20	508
		7.32	185,9	<b>S6824</b>	<b>S6825</b>	Crimpless SunBundler® 24	24	610
		8.59	218,2	<b>S6828</b>	<b>S6829</b>	Crimpless SunBundler® 28	28	711
		9.87	250,7	<b>S6832</b>	<b>S6833</b>	Crimpless SunBundler® 32	32	813
		11.13	282,7	<b>S6836</b>	<b>S6837</b>	Crimpless SunBundler® 36	36	914
		12.41	315,2	<b>S6840</b>	<b>S6841</b>	Crimpless SunBundler® 40	40	1016
		13.63	346,2	<b>S6844</b>	<b>S6845</b>	Crimpless SunBundler® 44	44	1118
				<b>S6390</b>		Crimpless SunBundler Release Plier		

#### Material Quick Specs:

##### Cable

**Material :** Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket

**Certifications:** UL Pending

**Temperature Range:** -40°F (-40°C) to 221°F (105°C)

##### Cube

UV / Heat Stable Nylon 6/6

**[Visit our blog for more information.](#)**