



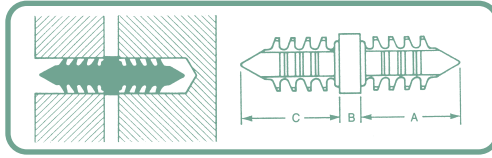

Christmas Tree™ Clips CONTINUED

DOUBLE END



Installation: One end of clip is pressed into hole in primary panel. Assembly is completed by pressing second panel onto projecting ribbed shank.

Part No.	Prong A					Prong C			
	Point Style	Hole Diameter	Panel Thickness*	Prong Length A	Head Thick. B	Point Style	Hole Diameter	Panel Thickness	Prong Length C
354-201960-00	Round	.312-.328	.125-.375	.440-.470	.025-.055	Round	.312-.328	.140-.750	.840-.870
354-201960-01	Round	.312-.328	.105-.320	.326-.346	.035-.045	Blunt	.312-.328	.105-.440	.448-.468
XTC Double End	Conical	.150-.162	.105-.250	.293-.317	.063-.071	Conical	.150-.162	.105-.250	.293-.317

*Due to unique prong design, recommended panel thickness range can be exceeded in certain applications. Christmas Tree Clips don't have to extend beyond the panel and will hold securely in blind holes if the panel material is softer than the Christmas Tree Clip (i.e. wood, particle board, rigid foam, etc.).



Clip Fastener - Push On



This versatile 2-piece construction (screw and wing nut combination) can be pushed on for fast assembly. This clip is extremely popular for sign and display construction as it is removable and reusable.

Manufactured in either clear or black polycarbonate, it pushes into a .187" hole and comes with a 7/8" long screw (3/4" grip capacity) with 9/16" O.D. round head screw and push-on/screw-off wing nut fastener.



Shelf Dart Clip



This white polypropylene clip fits most round, square or diamond-shaped perforated shelf holes. Grips material up to 3/32" thick and provides a secure hold. It is removable with a pinch and can be reused.

It is designed for a .250" hole and has an overall length of .500" with a head diameter of .375".