



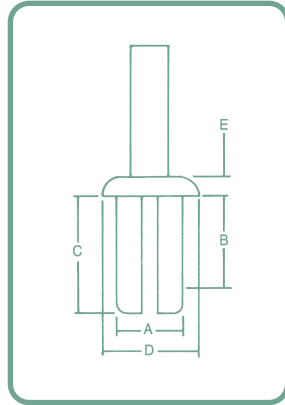

Plasti-Rivets®

STANDARD

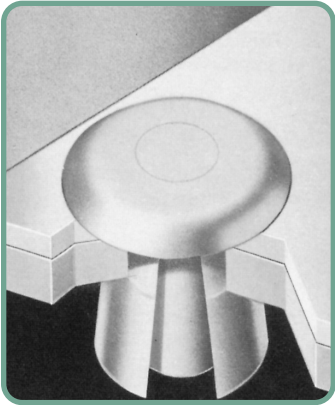

Standard, straight-side, binder head blind fasteners. Standard part economy and availability. Fasten a wide variety of materials, from paperboard to plastics to metal. Easy, one-sided installation. Different lengths accommodate many material thicknesses. Straight-sided rivets are easily inserted in prepared hole. Drive pins are pre-started for easier installation. Moulded from non-conductive thermoplastic that can be colour-coordinated to match product.

Installation: Straight sided rivet is inserted in hole. Rivet legs are tapered on the inside and expand as drive pin is advanced, assuring positive lock.




Rivet installation tools are available.

Part No.	A Nominal Hole Diameter	B Panel Thickness Range	C Prong Length	D Head Diameter	E Head Height
231-080551-05	.125	.031 -.140	.210 -.240	.218	.060
231-090741-00	.136	.040 -.218	.266 -.296	.220	.050
231-121041-02	.188	.040 -.375	.391 -.421	.281	.062
231-161341-03	.250	.040 -.462	.485 -.515	.437	.080
201-161751-00	.250	.281 -.500	.610 -.640	.375	.100
231-250603-00	.250	.120 -.200	.560	.700	.100


Colours: Add suffix 0101 for natural nylon 6 or suffix 0075 for black.

Plasti-Rivets® CONTINUED

SPECIAL

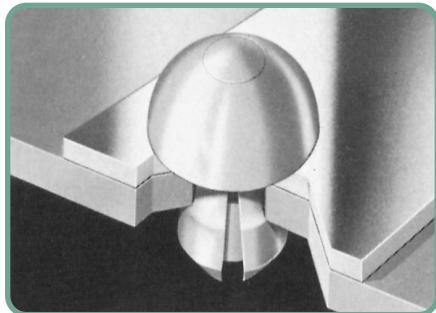

Wide variety of styles and sizes to accommodate different materials and panel thicknesses. Functional head styles provide panel spacing, load distribution, flush mounting, or appearance requirements. Tapered prongs snap positively into fastening hole and expand to hold securely as pin is driven.

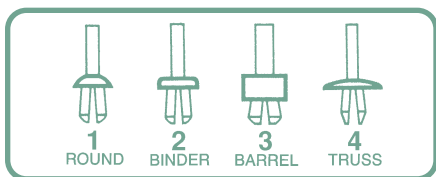

Part No.	A Nominal Hole Dia.	B Panel Thickness Range	C Prong Length	Head Style	D Head Diameter	E Head Height
201-100841-00	.156	.187 -.250	.293 -.323	2	.218	.050
201-101041-00	.156	.218 -.312	.355 -.385	2	.218	.050
201-120541-00	.187	.062 -.156	.198 -.228	3	.375	.125
201-120741-00	.187	.062 -.187	.280 -.310	2	.437	.075
201-120741-01	.187	.062 -.187	.280 -.310	4	.320	.075
201-120751-00	.187	.062 -.187	.280 -.310	1	.281	.075
201-121041-00	.187	.156 -.281	.376 -.406	2	.437	.075
201-121541-00	.190	.312 -.440	.519 -.549	2	.281	.078
201-121741-00	.190	.375 -.500	.593 -.623	2	.437	.075
201-161241-00	.250	.060 -.250	.351 -.381	2	.437	.187
201-161751-00	.250	.281 -.500	.610 -.640	1	.375	.110
201-180401-00	.272	.031 -.109	.175 -.205	3	.375	.312
201-181141-00	.281	.134 -.320	.453 -.483	2	.625	.109

Colours: Add suffix 0101 for natural nylon 6 or suffix 0075 for black.