


# Vertical Orientation - Top Entry

For low cost wire management. The push-mount style comes in vertical orientation for top entry and narrow width, and horizontal orientation for side entry and low height (good when clearance is a problem). Both are available with either a regular gate or a latch gate closure. Install with fingertip pressure into a 3/16" diameter mounting hole. The bayonet mount self-adjusts to various chassis thicknesses up to .090". These are stocked in white nylon but are also available in black.

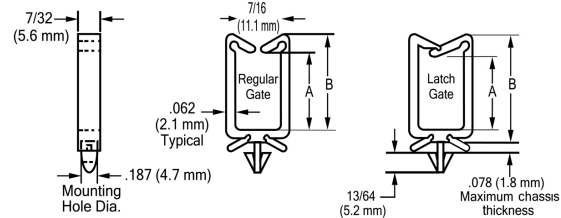

Part No.	A - Fraction	A (in)	A (mm)	B - Fraction	B (in)	B (mm)	C - Fraction	C (in)	C (mm)	Gate Type	Material	Colour
CHR12-WH	11/64	0.172	4.37	11/32	0.344	8.73	31/64	0.484	12.30	Regular Gate	Nylon	White
CHR18-WH	25/64	0.391	9.92	37/64	0.578	14.68	23/32	0.719	18.26	Regular Gate	Nylon	White
CHR27-WH	3/4	0.750	19.05	15/16	0.938	23.81	1-1/16	1.063	26.99	Regular Gate	Nylon	White
CHR35-WH	1-1/16	1.063	26.99	1-1/4	1.250	31.75	1-3/8	1.375	34.93	Regular Gate	Nylon	White
CHL12-WH	9/64	0.141	3.57	11/32	0.344	8.73	31/64	0.484	12.30	Latch Gate	Nylon	White
CHL18-WH	23/64	0.359	9.13	37/64	0.578	14.68	23/32	0.719	18.26	Latch Gate	Nylon	White
CHL27-WH	23/32	0.719	18.26	15/16	0.938	23.81	1-1/16	1.063	26.99	Latch Gate	Nylon	White
CHL35-WH	1-1/32	1.031	26.19	1-1/4	1.250	31.75	1-3/8	1.375	34.93	Latch Gate	Nylon	White
CHR27-BL	3/4	0.750	19.05	15/16	0.938	23.81	1-1/16	1.063	26.99	Regular Gate	Nylon	Black

Minimum order 1000.

Countless Possibilities, Millions Of Solutions  
**(416) 242-6811**